



# BoxRail® | 107

107-BX-X-4-48-X-X-X-X-X-Z-LO-359-S1-X-AL / WH-X

The performance data in black text is confirmed through third party testing (see the following Light Laboratory report for details). The performance data in grey text is calculated by Vode, for reference only.

Technical Support: (707) 996-9898

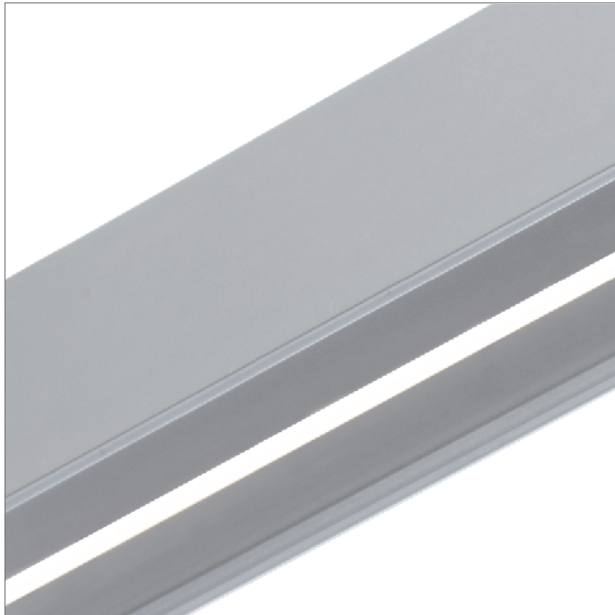

## Details

Rail Type / Length	BoxRail, 48"
LED Type	Zipper Board
Lumen Output	Low Output
Color Temperature	3500K, 90+ CRI
Optics	40° White Symmetric Lens

## Performance Summary

	2700K	3000K	3500K	4000K
Color Temperature	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	36	37	38	39
Total Lumens, 4' rail (1219mm)	530	547	558	569
Lumens per foot (305mm)	133	137	140	142
Input Power (W), 4' rail (1219mm)	15.0	15.0	15.0	15.0
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	-	-	96	-

© 2017 Vode Lighting LLC. All rights reserved. The Vode logo and Vode, are either registered trademarks or trademarks of Vode Lighting LLC in the United States and/or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. No part of the above drawing, design, arrangements or ideas thereon shall be duplicated or used for any purpose whatsoever without the express permission of Vode Lighting LLC. Due to ongoing innovation, specifications may change without notice.



**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_107\_BX\_LO\_359\_S1.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
 [TEST] L071704208 (SOURCE REPORT FOR REFERENCE)  
 [TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB  
 [ISSUEDATE] 11/1/2017  
 [MANUFAC] Vode Lighting  
 [LUMCAT] 107-BX-48-Z-LO-359-S1-AL/WH  
 [LUMINAIRE] BoxRail LED, 48", 3500K, 90 CRI, zipper board,  
 [MORE] 40° white symmetric lens, low output  
 [TEST PROCEDURE] IESNA:LM-79-08

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	558
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	37
Total Luminaire Watts	14.95
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.68
Spacing Criterion (90-270)	1.18
Spacing Criterion (Diagonal)	0.86
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.02 ft
Luminous Width (90-270)	3.85 ft
Luminous Height	0.00 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	9217	14958	39486
55	6954	10059	26078
65	6067	7753	17191
75	5504	6330	11834
85	0	1634	6538

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_107\_BX\_LO\_359\_S1.IES**

**CANDELA TABULATION**

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0.0</b>	459.51	459.51	459.51	459.51	459.51	459.51	459.51	459.51	459.51	459.51
<b>1.0</b>	441.15	440.64	440.13	443.19	451.35	459.00	462.57	463.08	463.59	464.10
<b>3.0</b>	437.58	437.58	437.07	441.15	449.31	456.45	459.51	460.02	461.04	461.55
<b>5.0</b>	429.93	429.93	429.93	434.01	443.19	449.82	452.37	453.39	454.92	455.94
<b>7.0</b>	415.14	415.14	415.65	419.73	429.42	437.58	439.11	441.15	443.70	446.76
<b>9.0</b>	397.29	397.29	397.80	401.88	411.57	420.24	422.28	425.34	429.42	433.50
<b>11.0</b>	377.91	377.91	377.91	381.99	392.70	399.33	401.88	406.47	412.08	418.20
<b>13.0</b>	351.90	352.41	353.43	358.53	368.73	376.38	379.44	385.56	393.21	401.37
<b>15.0</b>	325.38	325.89	327.93	333.54	343.74	350.88	353.43	360.57	370.26	379.95
<b>17.0</b>	296.82	297.33	298.86	307.02	317.22	322.83	325.89	334.56	345.78	357.00
<b>19.5</b>	258.57	259.59	263.16	272.34	281.52	286.11	290.19	301.92	314.67	328.44
<b>22.5</b>	216.75	217.77	221.34	228.99	237.15	242.25	246.84	259.59	274.89	291.72
<b>25.5</b>	177.48	178.50	182.07	188.70	195.33	199.41	205.53	219.30	234.60	252.45
<b>29.0</b>	137.19	138.21	141.27	146.88	154.02	157.59	163.20	174.93	190.74	208.08
<b>33.0</b>	101.49	102.00	104.55	109.14	115.26	119.34	123.42	134.13	147.90	164.22
<b>37.5</b>	73.44	73.95	75.99	79.05	82.62	85.17	89.25	98.43	109.65	122.91
<b>42.5</b>	53.04	53.55	54.57	56.61	59.16	61.71	64.26	69.87	77.52	87.72
<b>47.5</b>	40.29	40.80	41.31	42.84	44.37	45.90	47.94	51.51	57.12	63.75
<b>55.0</b>	28.56	28.56	29.07	29.58	30.60	31.62	32.64	35.19	37.74	41.31
<b>65.0</b>	18.36	18.36	18.36	18.87	19.38	19.38	19.89	20.91	21.93	23.46
<b>75.0</b>	10.20	10.20	10.20	10.20	10.20	10.71	10.71	11.22	11.22	11.73
<b>85.0</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.51	0.51	0.51	1.02
<b>90.0</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**Vert. Angles**      **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
<b>0.0</b>	459.51	459.51	459.51	459.51	459.51	459.51	459.51	459.51	459.51
<b>1.0</b>	464.10	464.61	465.12	465.63	466.14	466.65	466.65	466.65	467.67
<b>3.0</b>	462.06	463.08	464.61	465.12	465.63	467.16	467.67	466.65	466.65
<b>5.0</b>	457.98	459.00	460.53	462.06	463.59	464.61	466.65	465.63	465.63
<b>7.0</b>	449.31	451.86	454.41	456.96	459.00	461.04	463.59	463.59	463.59
<b>9.0</b>	437.58	442.17	446.25	449.82	453.90	456.45	459.00	461.04	461.55
<b>11.0</b>	424.32	429.93	436.05	443.70	448.29	452.37	455.94	456.45	456.96
<b>13.0</b>	409.53	417.69	425.34	432.48	439.11	444.21	449.82	450.84	451.86
<b>15.0</b>	390.66	400.86	410.55	420.24	428.91	437.07	442.68	446.25	447.27
<b>17.0</b>	370.26	382.50	395.25	406.98	417.18	425.85	432.99	438.60	440.13
<b>19.5</b>	343.23	359.04	374.34	388.62	400.86	414.12	421.77	425.85	427.38
<b>22.5</b>	309.06	327.42	345.27	363.12	378.93	393.21	402.90	409.53	411.06
<b>25.5</b>	271.32	292.23	313.14	333.54	352.41	369.24	381.99	390.15	392.70
<b>29.0</b>	228.48	250.41	273.87	297.33	318.75	338.13	353.94	362.61	366.18
<b>33.0</b>	184.62	206.04	229.50	253.98	277.44	299.37	316.71	326.40	329.97
<b>37.5</b>	139.74	159.63	182.07	205.53	228.99	250.41	268.77	279.99	283.05
<b>42.5</b>	100.98	116.28	135.15	155.55	176.46	195.84	213.18	223.38	226.95
<b>47.5</b>	72.93	84.15	97.92	113.73	130.56	146.88	160.65	169.32	172.89
<b>55.0</b>	45.90	52.02	60.18	69.36	79.56	90.27	98.94	104.55	107.10
<b>65.0</b>	25.50	28.05	31.11	35.19	39.78	44.37	48.45	51.00	52.02
<b>75.0</b>	12.75	13.77	14.79	15.81	17.34	18.87	20.40	21.42	21.93
<b>85.0</b>	2.04	3.06	3.57	3.57	4.08	4.08	4.08	4.08	4.08
<b>90.0</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_107\_BX\_LO\_359\_S1.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	142.98	N.A.	25.60
0-30	262.97	N.A.	47.10
0-40	359.09	N.A.	64.30
0-60	488.14	N.A.	87.50
0-80	549.17	N.A.	98.40
0-90	558.08	N.A.	100.00
10-90	523.53	N.A.	93.80
20-40	216.11	N.A.	38.70
20-50	300.94	N.A.	53.90
40-70	168.15	N.A.	30.10
60-80	61.02	N.A.	10.90
70-80	21.92	N.A.	3.90
80-90	8.92	N.A.	1.60
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	558.08	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	34.55
10-20	108.43
20-30	119.98
30-40	96.12
40-50	84.84
50-60	44.21
60-70	39.10
70-80	21.92
80-90	8.92
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_107\_BX\_LO\_359\_S1.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88
2	103	96	90	85	100	94	89	85	91	86	83	87	84	81	85	82	79	77
3	95	87	80	74	93	85	79	74	82	77	73	80	75	71	77	74	70	68
4	89	79	72	66	87	78	71	65	75	69	65	73	68	64	71	67	63	61
5	83	72	65	59	81	71	64	59	69	63	58	67	62	58	66	61	57	55
6	78	66	59	53	76	66	58	53	64	58	53	62	57	52	61	56	52	50
7	73	61	54	49	72	61	54	48	59	53	48	58	52	48	57	52	48	46
8	69	57	50	45	67	56	49	45	55	49	44	54	48	44	53	48	44	42
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39
10	61	50	43	38	60	49	43	38	48	42	38	48	42	38	47	41	38	36

POLAR GRAPH

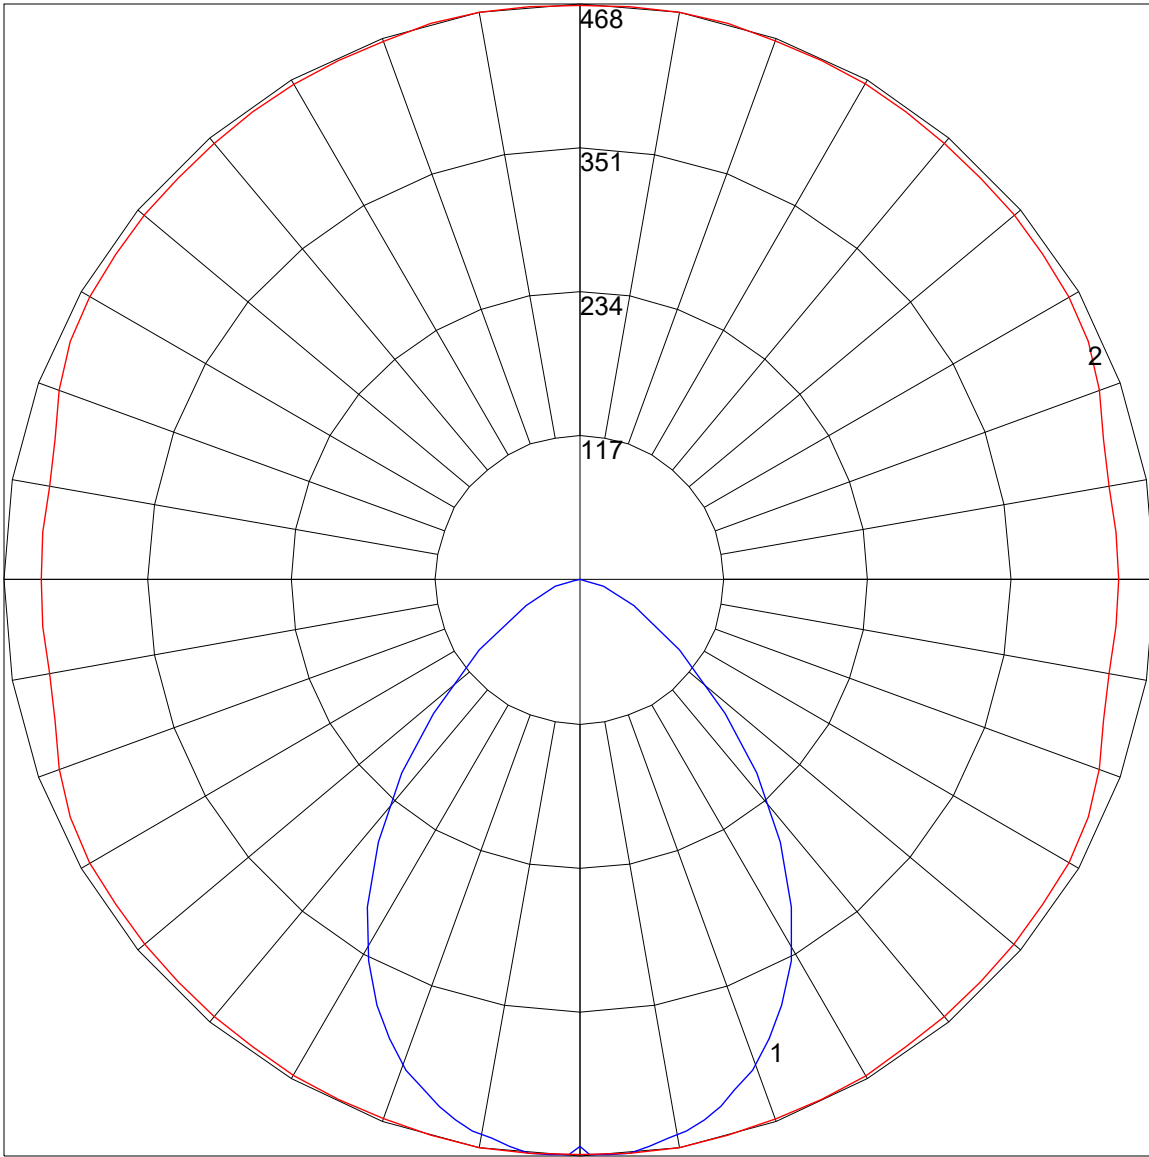

Maximum Candela = 467.67 Located At Horizontal Angle = 80, Vertical Angle = 3  
# 1 - Vertical Plane Through Horizontal Angles (80 - 260) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (3) (Through Max. Cd.)