


WingRail® | 107

107-WG-X-4-48-X-X-X-X-X-X-Z-HO-35-C1-X-X-X

The performance data in black text is confirmed through third party testing (see the following Light Laboratory report for details). The performance data in grey text is calculated by Vode, for reference only.

Technical Support: (707) 996-9898



Details

Rail Type / Length	WingRail, 48"
LED Type	Zipper Board
Lumen Output	High Output
Color Temperature	3500K, 80+ CRI
Optics	Clear with Edge Softening Lens

Performance Summary

Color Temperature	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	105	108	110	112
Total Lumens, 4' rail (1219mm)	5128	5290	5398	5505
Lumens per foot (305mm)	1282	1322	1349	1376
Input Power (W), 4' rail (1219mm)	49.2	49.2	49.2	49.2
Watts per foot (305mm)	12.4	12.4	12.4	12.4
CRI	-	-	85	-

© 2017 Vode Lighting LLC. All rights reserved. The Vode logo and Vode, are either registered trademarks or trademarks of Vode Lighting LLC in the United States and/or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. No part of the above drawing, design, arrangements or ideas thereon shall be duplicated or used for any purpose whatsoever without the express permission of Vode Lighting LLC. Due to ongoing innovation, specifications may change without notice.



IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_C1.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L071704217 (SOURCE REPORT FOR REFERENCE)
[TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB
[ISSUEDATE] 11/1/2017
[MANUFAC] Vode Lighting
[LUMCAT] 107-WG-48-Z-HO-35-C1
[LUMINAIRE] WingRail LED, 48", 3500K, 80 CRI, zipper board,
[MORE] clear lens w/edge softening, high output
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	5402
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	110
Total Luminaire Watts	49.22
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.66
Spacing Criterion (90-270)	1.24
Spacing Criterion (Diagonal)	1.30
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.13 ft
Luminous Width (90-270)	3.83 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	66870	59585	40136
55	67611	59901	35669
65	60139	54620	29897
75	47879	45251	23282
85	32897	34570	14497

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_C1.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50
5	2196.00	2196.00	2193.75	2191.50	2189.25	2187.00	2182.50	2178.00	2173.50	2166.75
10	2281.50	2279.25	2277.00	2274.75	2268.00	2263.50	2254.50	2245.50	2234.25	2223.00
15	2337.75	2337.75	2333.25	2328.75	2322.00	2310.75	2299.50	2286.00	2270.25	2254.50
20	2371.50	2369.25	2364.75	2358.00	2349.00	2335.50	2322.00	2304.00	2283.75	2261.25
25	2385.00	2382.75	2376.00	2367.00	2355.75	2340.00	2319.75	2299.50	2272.50	2245.50
30	2376.00	2373.75	2369.25	2358.00	2342.25	2322.00	2301.75	2274.75	2243.25	2209.50
35	2346.75	2344.50	2337.75	2324.25	2306.25	2286.00	2259.00	2227.50	2191.50	2151.00
40	2288.25	2286.00	2279.25	2263.50	2245.50	2218.50	2189.25	2153.25	2112.75	2067.75
45	2189.25	2187.00	2178.00	2162.25	2142.00	2112.75	2081.25	2043.00	1998.00	1950.75
50	2029.50	2025.00	2018.25	2002.50	1982.25	1957.50	1926.00	1887.75	1842.75	1793.25
55	1795.50	1793.25	1786.50	1777.50	1759.50	1737.00	1712.25	1676.25	1635.75	1590.75
60	1503.00	1503.00	1496.25	1489.50	1476.00	1460.25	1440.00	1415.25	1381.50	1343.25
65	1176.75	1176.75	1174.50	1170.00	1163.25	1152.00	1138.50	1120.50	1098.00	1068.75
70	859.50	857.25	857.25	855.00	852.75	846.00	839.25	828.00	814.50	794.25
75	573.75	573.75	573.75	573.75	573.75	571.50	567.00	562.50	553.50	542.25
80	326.25	326.25	326.25	328.50	328.50	330.75	328.50	328.50	324.00	317.25
85	132.75	132.75	132.75	135.00	137.25	137.25	139.50	139.50	139.50	139.50
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>	<u>95</u>
0	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50
5	2160.00	2153.25	2146.50	2137.50	2130.75	2121.75	2112.75	2103.75	2094.75	2085.75
10	2209.50	2193.75	2178.00	2162.25	2144.25	2126.25	2106.00	2088.00	2067.75	2047.50
15	2234.25	2211.75	2187.00	2162.25	2137.50	2110.50	2081.25	2049.75	2020.50	1986.75
20	2234.25	2207.25	2175.75	2142.00	2108.25	2072.25	2034.00	1993.50	1950.75	1905.75
25	2214.00	2180.25	2142.00	2101.50	2058.75	2013.75	1966.50	1914.75	1863.00	1804.50
30	2171.25	2130.75	2085.75	2038.50	1989.00	1935.00	1878.75	1818.00	1752.75	1683.00
35	2106.00	2058.75	2009.25	1953.00	1896.75	1836.00	1768.50	1701.00	1624.50	1543.50
40	2016.00	1964.25	1905.75	1847.25	1782.00	1714.50	1640.25	1563.75	1478.25	1386.00
45	1896.75	1838.25	1775.25	1710.00	1638.00	1566.00	1487.25	1404.00	1314.00	1215.00
50	1737.00	1676.25	1611.00	1541.25	1469.25	1395.00	1311.75	1228.50	1136.25	1035.00
55	1536.75	1480.50	1415.25	1345.50	1273.50	1199.25	1120.50	1037.25	947.25	850.50
60	1296.00	1244.25	1188.00	1127.25	1057.50	990.00	915.75	841.50	760.50	675.00
65	1035.00	990.00	942.75	891.00	834.75	771.75	715.50	652.50	585.00	517.50
70	769.50	740.25	704.25	663.75	618.75	571.50	524.25	474.75	420.75	371.25
75	526.50	504.00	479.25	450.00	420.75	384.75	351.00	315.00	279.00	243.00
80	308.25	297.00	283.50	263.25	243.00	222.75	200.25	177.75	155.25	135.00
85	132.75	128.25	123.75	114.75	101.25	92.25	81.00	69.75	58.50	51.75
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles Horizontal Angles

	<u>100</u>	<u>105</u>	<u>110</u>	<u>115</u>	<u>120</u>	<u>125</u>	<u>130</u>	<u>135</u>	<u>140</u>	<u>145</u>
0	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50
5	2076.75	2067.75	2058.75	2049.75	2043.00	2034.00	2027.25	2018.25	2011.50	2004.75
10	2027.25	2007.00	1986.75	1966.50	1946.25	1926.00	1908.00	1890.00	1874.25	1858.50
15	1955.25	1921.50	1887.75	1856.25	1822.50	1788.75	1757.25	1723.50	1694.25	1665.00
20	1863.00	1818.00	1768.50	1719.00	1669.50	1620.00	1570.50	1516.50	1469.25	1422.00
25	1748.25	1687.50	1622.25	1554.75	1487.25	1415.25	1345.50	1271.25	1206.00	1147.50
30	1613.25	1539.00	1455.75	1368.00	1280.25	1190.25	1102.50	1019.25	949.50	891.00
35	1460.25	1370.25	1271.25	1165.50	1064.25	965.25	875.25	801.00	742.50	695.25

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_C1.IES

CANDELA TABULATION - (Cont.)

40	1291.50	1190.25	1077.75	967.50	859.50	767.25	690.75	630.00	587.25	553.50
45	1113.75	1003.50	888.75	780.75	684.00	607.50	549.00	506.25	474.75	450.00
50	931.50	823.50	715.50	621.00	542.25	483.75	441.00	409.50	387.00	371.25
55	753.75	657.00	564.75	488.25	427.50	384.75	355.50	333.00	317.25	303.75
60	591.75	510.75	434.25	378.00	333.00	303.75	281.25	265.50	254.25	245.25
65	447.75	384.75	328.50	285.75	254.25	231.75	218.25	204.75	198.00	189.00
70	321.75	272.25	234.00	204.75	184.50	168.75	157.50	150.75	144.00	139.50
75	209.25	182.25	150.75	132.75	119.25	110.25	103.50	96.75	94.50	90.00
80	114.75	94.50	81.00	69.75	63.00	58.50	54.00	51.75	49.50	47.25
85	40.50	31.50	27.00	22.50	20.25	20.25	18.00	15.75	15.75	13.50
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Horizontal Angles

	<u>150</u>	<u>155</u>	<u>160</u>	<u>165</u>	<u>170</u>	<u>175</u>	<u>180</u>
0	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50	2101.50
5	2000.25	1995.75	1991.25	1986.75	1984.50	1982.25	1982.25
10	1842.75	1831.50	1820.25	1811.25	1806.75	1802.25	1802.25
15	1638.00	1615.50	1595.25	1579.50	1568.25	1561.50	1559.25
20	1379.25	1345.50	1314.00	1289.25	1271.25	1260.00	1257.75
25	1095.75	1053.00	1017.00	990.00	972.00	960.75	958.50
30	843.75	805.50	776.25	756.00	742.50	733.50	731.25
35	657.00	630.00	609.75	596.25	587.25	580.50	578.25
40	528.75	508.50	495.00	486.00	477.00	474.75	472.50
45	432.00	420.75	409.50	400.50	396.00	393.75	391.50
50	357.75	348.75	339.75	333.00	328.50	326.25	326.25
55	294.75	285.75	279.00	274.50	272.25	267.75	267.75
60	236.25	231.75	225.00	220.50	218.25	216.00	216.00
65	184.50	180.00	175.50	173.25	171.00	168.75	168.75
70	135.00	130.50	128.25	126.00	123.75	123.75	123.75
75	87.75	85.50	83.25	81.00	81.00	81.00	81.00
80	45.00	45.00	42.75	42.75	42.75	42.75	42.75
85	13.50	13.50	11.25	11.25	11.25	11.25	11.25
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_C1.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	757.34	N.A.	14.00
0-30	1570.13	N.A.	29.10
0-40	2518.3	N.A.	46.60
0-60	4358.68	N.A.	80.70
0-80	5315.44	N.A.	98.40
0-90	5402.13	N.A.	100.00
10-90	5203.62	N.A.	96.30
20-40	1760.96	N.A.	32.60
20-50	2735.35	N.A.	50.60
40-70	2465.11	N.A.	45.60
60-80	956.76	N.A.	17.70
70-80	332.04	N.A.	6.10
80-90	86.69	N.A.	1.60
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	5402.13	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	198.51
10-20	558.83
20-30	812.79
30-40	948.16
40-50	974.39
50-60	866.00
60-70	624.72
70-80	332.04
80-90	86.69
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_C1.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	97	106	102	98	95	98	95	92	94	91	89	90	88	86	84
2	99	91	85	79	97	89	83	78	86	81	76	83	78	75	80	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	68	63	71	66	62	60
4	83	71	63	56	81	70	62	56	68	61	55	65	59	54	63	58	53	51
5	77	64	55	48	74	63	54	48	61	53	48	59	52	47	57	51	47	45
6	71	58	49	42	69	57	48	42	55	47	42	53	47	41	52	46	41	39
7	66	52	44	38	64	52	43	37	50	43	37	49	42	37	47	41	37	35
8	61	48	39	34	60	47	39	33	46	38	33	45	38	33	43	37	33	31
9	57	44	36	30	56	43	36	30	42	35	30	41	35	30	40	34	30	28
10	54	41	33	28	52	40	33	27	39	32	27	38	32	27	37	31	27	25

POLAR GRAPH

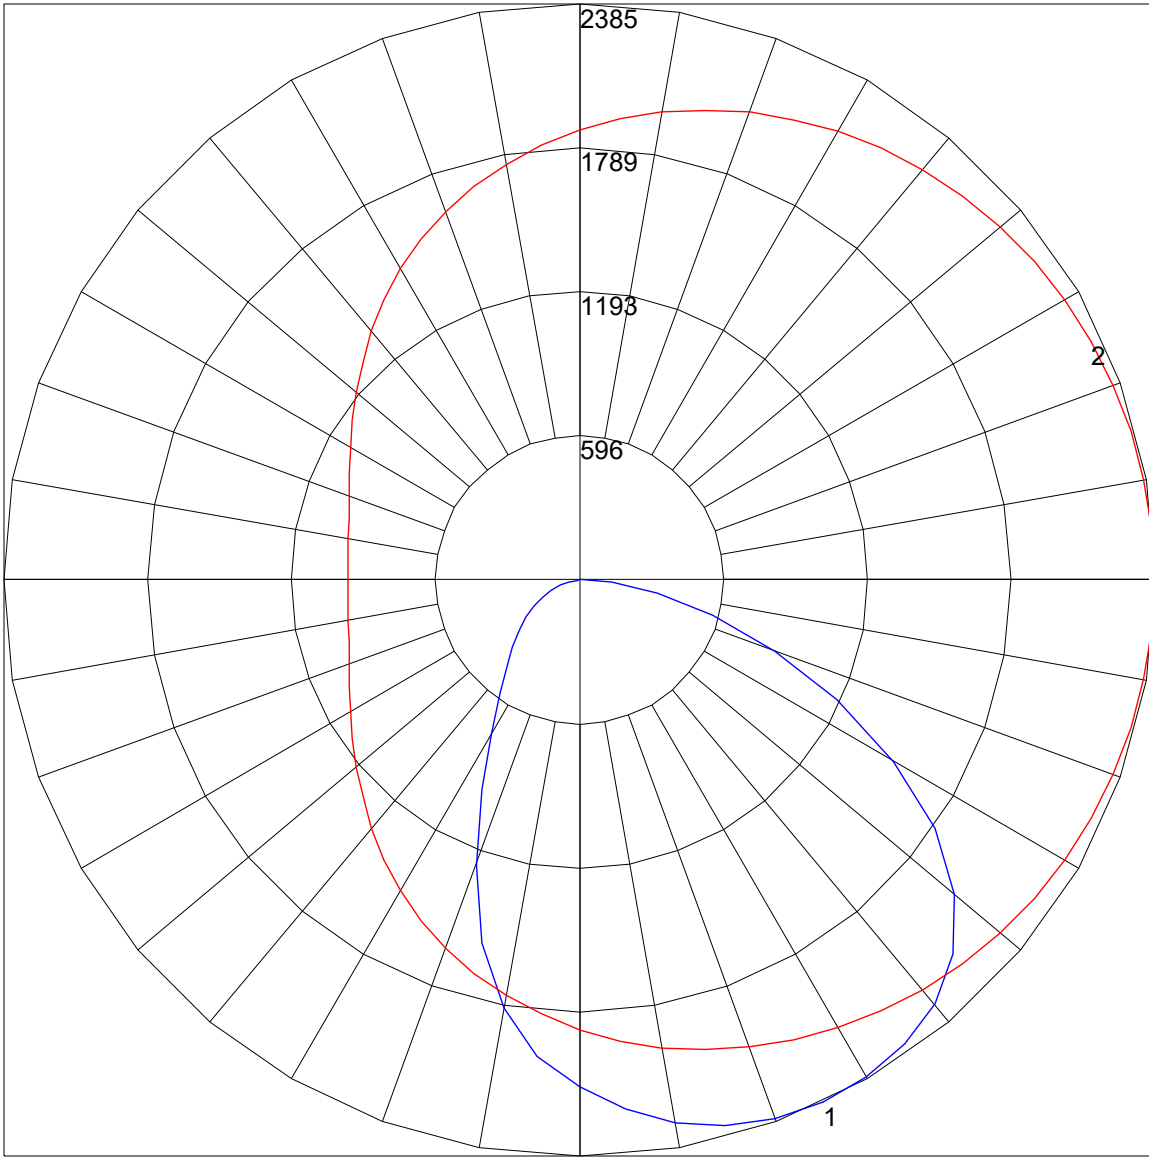

Maximum Candela = 2385 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)