


# ZipTwo™ | 707

707-Z2-4-48-X-X-X-0-Z-SO-35-S6-0-WH

The performance data in black text is confirmed through third party testing (see the following Light Laboratory report for details). The performance data in grey text is calculated by Vode, for reference only.

Technical Support: (707) 996-9898



## Details

Rail Type / Length	ZipTwo, 48"
LED Type	Zipper Board
Lumen Output	Standard Output
Color Temperature	3500K, 80+ CRI
Optics	Diffuse Square

## Performance Summary

	2700K	3000K	3500K	4000K
Color Temperature	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	126	130	132	135
Total Lumens, 4' rail (1219mm)	3269	3372	3441	3510
Lumens per foot (305mm)	817	843	860	877
Input Power (W), 4' rail (1219mm)	26.1	26.1	26.1	26.1
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	-	-	85	-

© 2017 Vode Lighting LLC. All rights reserved. The Vode logo and Vode, are either registered trademarks or trademarks of Vode Lighting LLC in the United States and/or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. No part of the above drawing, design, arrangements or ideas thereon shall be duplicated or used for any purpose whatsoever without the express permission of Vode Lighting LLC. Due to ongoing innovation, specifications may change without notice.



**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_SO\_35\_S6.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
 [TEST] L071704233 (SOURCE REPORT FOR REFERENCE)  
 [TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB  
 [ISSUEDATE] 11/1/2017  
 [MANUFAC] Vode Lighting  
 [LUMCAT] 707-Z2-48-Z-SO-35-S6  
 [LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, zipper board,  
 [MORE] diffuse square lens, standard output  
 [TEST PROCEDURE] IESNA:LM-79-08

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3432
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	131
Total Luminaire Watts	26.17
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.70
Spacing Criterion (90-270)	1.22
Spacing Criterion (Diagonal)	1.64
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.13 ft
Luminous Width (90-270)	4.02 ft
Luminous Height	0.10 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	10326	9596	9830
55	10300	9306	9203
65	9979	8917	8588
75	9320	8544	7962
85	8576	8088	7206

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_SO\_35\_S6.IES**

**CANDELA TABULATION**

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
<b>0</b>	562.400	562.400	562.400	562.400	562.400
<b>5</b>	577.811	576.147	571.238	564.040	558.801
<b>10</b>	592.797	589.221	578.294	563.013	549.196
<b>15</b>	603.877	598.390	580.312	555.910	532.735
<b>20</b>	613.081	603.723	577.704	543.119	510.987
<b>25</b>	619.842	606.768	571.344	525.584	485.122
<b>30</b>	625.329	607.889	561.538	503.931	453.179
<b>35</b>	629.058	606.862	549.101	478.844	418.983
<b>40</b>	630.427	603.428	533.372	451.020	383.701
<b>45</b>	627.784	596.230	514.905	420.741	346.177
<b>50</b>	619.158	583.888	492.803	386.839	305.703
<b>55</b>	602.496	565.267	467.386	355.735	265.630
<b>60</b>	577.315	539.933	438.523	321.043	225.463
<b>65</b>	543.024	506.432	403.643	284.498	185.779
<b>70</b>	500.993	466.548	370.225	247.458	146.875
<b>75</b>	453.757	423.242	332.654	211.692	109.445
<b>80</b>	403.100	378.756	293.065	175.973	77.207
<b>85</b>	355.676	332.111	254.125	141.730	39.200
<b>90</b>	314.918	290.811	220.955	111.357	13.912
<b>95</b>	295.130	275.483	208.954	107.392	9.216
<b>100</b>	282.197	263.482	201.060	104.548	9.015
<b>105</b>	270.432	252.308	193.319	101.220	8.815
<b>110</b>	259.069	241.428	184.941	97.692	8.720
<b>115</b>	247.021	229.970	175.832	92.842	8.520
<b>120</b>	233.982	217.332	166.038	87.355	8.425
<b>125</b>	219.775	204.046	155.595	79.367	8.331
<b>130</b>	204.199	189.449	140.798	71.331	8.130
<b>135</b>	187.242	172.799	123.463	62.564	8.036
<b>140</b>	168.823	155.642	107.935	54.776	7.741
<b>145</b>	148.940	134.532	92.842	46.350	7.540
<b>150</b>	127.865	110.814	80.889	39.294	7.646
<b>155</b>	106.117	88.476	66.186	32.143	0.000
<b>160</b>	83.780	65.844	50.315	27.140	0.000
<b>165</b>	58.894	47.035	36.792	21.948	0.000
<b>170</b>	34.975	30.715	26.361	16.260	0.000
<b>175</b>	16.166	17.830	15.340	10.537	0.000
<b>180</b>	0.000	0.000	0.000	0.000	0.000

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_SO\_35\_S6.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	217.35	N.A.	6.30
0-30	477.85	N.A.	13.90
0-40	816.20	N.A.	23.80
0-60	1613.26	N.A.	47.00
0-80	2329.19	N.A.	67.90
0-90	2583.22	N.A.	75.30
10-90	2528.71	N.A.	73.70
20-40	598.85	N.A.	17.50
20-50	988.55	N.A.	28.80
40-70	1183.00	N.A.	34.50
60-80	715.93	N.A.	20.90
70-80	329.99	N.A.	9.60
80-90	254.02	N.A.	7.40
90-110	385.51	N.A.	11.20
90-120	540.86	N.A.	15.80
90-130	664.69	N.A.	19.40
90-150	808.94	N.A.	23.60
90-180	848.51	N.A.	24.70
110-180	463.00	N.A.	13.50
0-180	3431.73	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	54.51
10-20	162.84
20-30	260.50
30-40	338.36
40-50	389.70
50-60	407.36
60-70	385.94
70-80	329.99
80-90	254.02
90-100	203.93
100-110	181.58
110-120	155.35
120-130	123.83
130-140	88.66
140-150	55.60
150-160	28.19
160-170	9.95
170-180	1.43


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_SO\_35\_S6.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	79	79	79	75
1	100	94	88	84	94	89	84	80	80	76	73	72	69	66	65	62	60	56
2	89	80	72	65	84	76	69	63	68	62	57	61	56	52	55	51	48	44
3	81	69	60	53	76	66	57	51	59	52	47	53	47	43	47	43	39	36
4	73	60	51	44	69	57	49	42	52	44	39	46	40	36	41	37	33	29
5	67	53	44	37	63	51	42	35	46	38	33	41	35	30	37	32	28	25
6	62	48	38	32	58	45	37	30	41	34	28	37	31	26	33	28	24	21
7	57	43	34	27	54	41	32	26	37	30	25	33	27	23	30	25	21	18
8	53	39	30	24	50	37	29	23	34	27	22	31	24	20	28	22	19	16
9	49	35	27	21	46	34	26	21	31	24	19	28	22	18	25	20	17	14
10	46	32	24	19	43	31	24	18	28	22	17	26	20	16	23	18	15	13

POLAR GRAPH

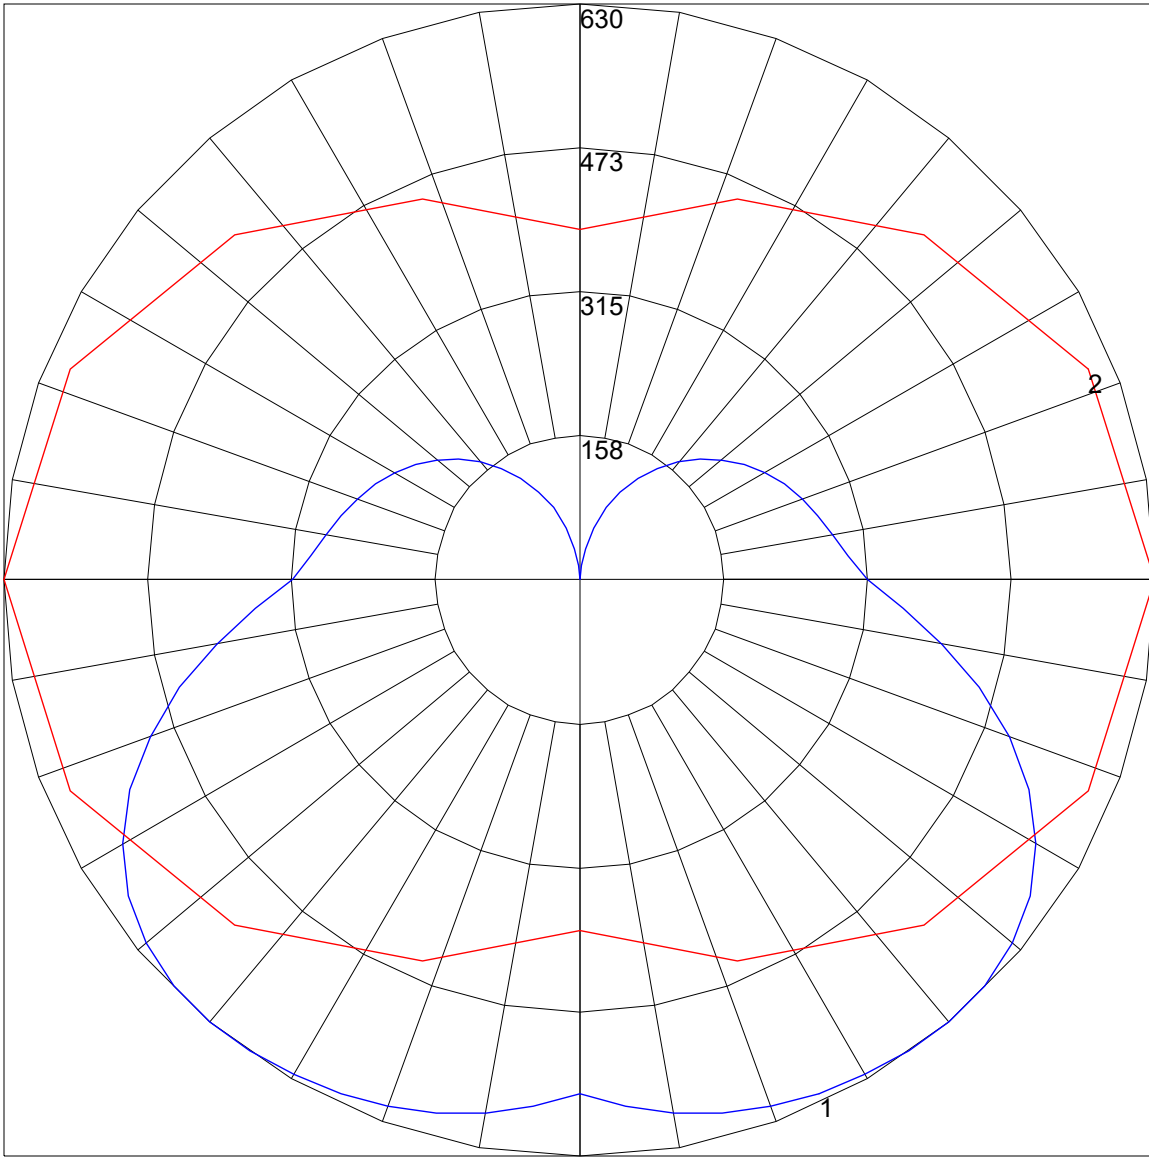

Maximum Candela = 630.427 Located At Horizontal Angle = 0, Vertical Angle = 40  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (40) (Through Max. Cd.)