

IES Report

ZipTwo® | 707 | 60° Symmetric | 90 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-359-S2-X-BL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	48	49	50	51
Total Lumens, 4' rail length (1219mm)	1866	1925	1965	2004
Lumens per foot (305mm)	467	481	491	501
Input Power (W), 4' rail length (1219mm)	39.4	39.4	39.4	39.4
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_HO\_359\_S2-BL.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
[TEST] L071704228 (SOURCE REPORT FOR REFERENCE)  
[TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB  
[ISSUEDATE] 11/1/2017  
[MANUFAC] Vode Lighting  
[LUMCAT] 707-Z2-48-Z-HO-359-S2-BL  
[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, zipper board,  
[MORE] 60° black symmetric lens, high output  
[TEST PROCEDURE] IESNA:LM-79-08

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1965
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	50
Total Luminaire Watts	39.36
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.82
Spacing Criterion (90-270)	1.16
Spacing Criterion (Diagonal)	0.98
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.02 ft
Luminous Width (90-270)	4.02 ft
Luminous Height	0.00 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	31546	61789	119092
55	14628	31754	69930
65	8232	17432	37770
75	5535	11070	22139
85	4696	7044	11740

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_HO\_359\_S2-BL.IES**

**CANDELA TABULATION**

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0.0</b>	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06
<b>1.0</b>	1533.06	1531.53	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06
<b>3.0</b>	1525.41	1525.41	1525.41	1525.41	1525.41	1526.94	1526.94	1526.94	1526.94	1528.47
<b>5.0</b>	1507.05	1507.05	1507.05	1508.58	1508.58	1510.11	1511.64	1513.17	1514.70	1516.23
<b>7.0</b>	1479.51	1479.51	1481.04	1482.57	1484.10	1487.16	1490.22	1493.28	1496.34	1499.40
<b>9.0</b>	1438.20	1438.20	1439.73	1442.79	1445.85	1450.44	1456.56	1461.15	1467.27	1473.39
<b>11.0</b>	1386.18	1387.71	1389.24	1393.83	1398.42	1406.07	1413.72	1421.37	1430.55	1441.26
<b>13.0</b>	1324.98	1326.51	1329.57	1335.69	1343.34	1352.52	1363.23	1373.94	1387.71	1399.95
<b>15.0</b>	1254.60	1256.13	1260.72	1266.84	1277.55	1289.79	1303.56	1318.86	1335.69	1354.05
<b>17.0</b>	1178.10	1179.63	1185.75	1194.93	1207.17	1222.47	1239.30	1259.19	1280.61	1302.03
<b>19.5</b>	1072.53	1074.06	1081.71	1092.42	1107.72	1126.08	1147.50	1173.51	1199.52	1227.06
<b>22.5</b>	937.89	939.42	948.60	960.84	979.20	1002.15	1029.69	1060.29	1092.42	1127.61
<b>25.5</b>	798.66	801.72	810.90	826.20	846.09	873.63	902.70	937.89	977.67	1017.45
<b>29.0</b>	641.07	644.13	654.84	670.14	691.56	720.63	754.29	792.54	835.38	882.81
<b>33.0</b>	478.89	481.95	491.13	506.43	527.85	556.92	590.58	630.36	677.79	726.75
<b>37.5</b>	327.42	330.48	338.13	351.90	370.26	396.27	426.87	463.59	507.96	555.39
<b>42.5</b>	206.55	208.08	214.20	223.38	238.68	258.57	283.05	313.65	350.37	391.68
<b>47.5</b>	126.99	128.52	133.11	139.23	149.94	163.71	180.54	203.49	231.03	261.63
<b>55.0</b>	62.73	62.73	65.79	68.85	74.97	81.09	91.80	102.51	117.81	136.17
<b>65.0</b>	26.01	26.01	27.54	29.07	30.60	33.66	36.72	42.84	48.96	55.08
<b>75.0</b>	10.71	10.71	10.71	10.71	12.24	13.77	15.30	16.83	18.36	21.42
<b>85.0</b>	3.06	3.06	3.06	3.06	3.06	3.06	3.06	4.59	4.59	4.59
<b>90.0</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**Vert. Angles**      **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
<b>0.0</b>	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06
<b>1.0</b>	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06	1533.06
<b>3.0</b>	1528.47	1528.47	1530.00	1530.00	1530.00	1530.00	1530.00	1531.53	1530.00
<b>5.0</b>	1517.76	1519.29	1520.82	1522.35	1523.88	1525.41	1525.41	1526.94	1526.94
<b>7.0</b>	1503.99	1507.05	1510.11	1513.17	1516.23	1517.76	1519.29	1520.82	1520.82
<b>9.0</b>	1479.51	1485.63	1491.75	1496.34	1500.93	1503.99	1507.05	1508.58	1508.58
<b>11.0</b>	1450.44	1459.62	1467.27	1474.92	1482.57	1488.69	1491.75	1494.81	1494.81
<b>13.0</b>	1413.72	1427.49	1439.73	1450.44	1459.62	1467.27	1473.39	1476.45	1477.98
<b>15.0</b>	1370.88	1387.71	1404.54	1419.84	1432.08	1442.79	1450.44	1455.03	1456.56
<b>17.0</b>	1324.98	1346.40	1367.82	1386.18	1401.48	1415.25	1424.43	1430.55	1433.61
<b>19.5</b>	1256.13	1283.67	1311.21	1335.69	1355.58	1373.94	1386.18	1393.83	1396.89
<b>22.5</b>	1162.80	1197.99	1233.18	1263.78	1291.32	1314.27	1329.57	1338.75	1343.34
<b>25.5</b>	1060.29	1103.13	1144.44	1182.69	1214.82	1242.36	1263.78	1276.02	1280.61
<b>29.0</b>	931.77	980.73	1029.69	1075.59	1115.37	1149.03	1173.51	1188.81	1193.40
<b>33.0</b>	780.30	833.85	888.93	939.42	983.79	1022.04	1051.11	1067.94	1074.06
<b>37.5</b>	607.41	664.02	719.10	772.65	820.08	861.39	891.99	910.35	918.00
<b>42.5</b>	437.58	488.07	538.56	589.05	631.89	671.67	700.74	719.10	725.22
<b>47.5</b>	298.35	338.13	377.91	419.22	455.94	489.60	514.08	529.38	533.97
<b>55.0</b>	157.59	179.01	203.49	227.97	250.92	270.81	287.64	296.82	299.88
<b>65.0</b>	62.73	71.91	82.62	91.80	100.98	108.63	114.75	119.34	119.34
<b>75.0</b>	24.48	27.54	30.60	33.66	36.72	39.78	41.31	42.84	42.84
<b>85.0</b>	4.59	6.12	6.12	6.12	7.65	7.65	7.65	7.65	7.65
<b>90.0</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_HO\_359\_S2-BL.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	499.00	N.A.	25.40
0-30	952.62	N.A.	48.50
0-40	1330.19	N.A.	67.70
0-60	1796.37	N.A.	91.40
0-80	1947.55	N.A.	99.10
0-90	1964.66	N.A.	100.00
10-90	1848.23	N.A.	94.10
20-40	831.19	N.A.	42.30
20-50	1151.34	N.A.	58.60
40-70	571.91	N.A.	29.10
60-80	151.18	N.A.	7.70
70-80	45.45	N.A.	2.30
80-90	17.11	N.A.	0.90
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1964.66	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	116.43
10-20	382.57
20-30	453.62
30-40	377.57
40-50	320.15
50-60	146.03
60-70	105.74
70-80	45.45
80-90	17.11
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_HO\_359\_S2-BL.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	104	101	109	105	103	100	101	99	97	98	96	94	94	93	91	89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	72	71
4	90	81	74	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63
5	84	74	67	61	83	73	66	61	71	65	60	69	64	60	67	63	59	57
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	50	58	53	49	48
8	70	58	51	46	68	58	51	46	56	50	46	55	50	46	54	49	45	44
9	66	54	47	42	65	54	47	42	53	47	42	52	46	42	51	46	42	40
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37

POLAR GRAPH

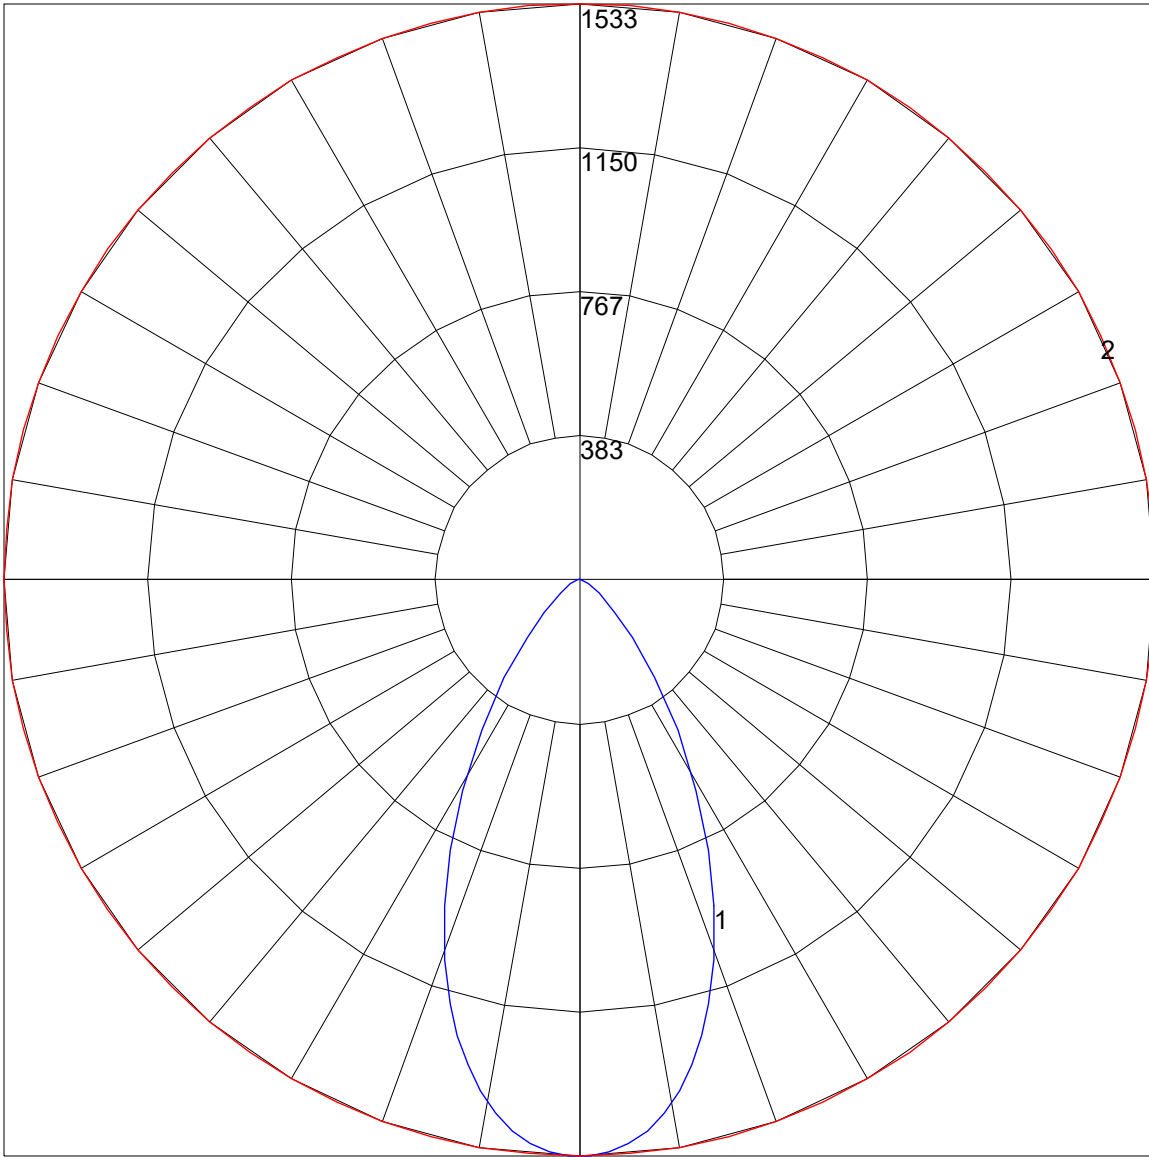

Maximum Candela = 1533.06 Located At Horizontal Angle = 0, Vertical Angle = 0  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)