

IES Report

ZipTwo® | 707 | 120° Symmetric | 90 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-359-S3-X-BL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	93	96	98	100
Total Lumens, 4' rail length (1219mm)	3654	3769	3846	3923
Lumens per foot (305mm)	913	942	962	981
Input Power (W), 4' rail length (1219mm)	39.4	39.4	39.4	39.4
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	95	95	95	95

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_SO_359_S3-BL.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L071704230 (SOURCE REPORT FOR REFERENCE)
[TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB
[ISSUEDATE] 11/1/2017
[MANUFAC] Vode Lighting
[LUMCAT] 707-Z2-48-Z-SO-359-S3-BL
[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, zipper board,
[MORE] 120° black symmetric lens, standard output
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2564
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	98
Total Luminaire Watts	26.22
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.54
Spacing Criterion (90-270)	1.14
Spacing Criterion (Diagonal)	1.48
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.02 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	36224	32510	22526
55	31338	28959	21050
65	23889	22275	19369
75	16736	15418	14232
85	11349	9783	7435

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_SO_359_S3-BL.IES

CANDELA TABULATION

	0	5	10	15	20	25	30	35	40	45
0	879.24	879.24	879.24	879.24	879.24	879.24	879.24	879.24	879.24	879.24
5	884.34	883.32	883.32	883.32	882.30	882.30	881.28	881.28	880.26	879.24
10	899.64	898.62	897.60	896.58	894.54	891.48	889.44	885.36	882.30	878.22
15	919.02	918.00	915.96	913.92	909.84	903.72	897.60	890.46	883.32	875.16
20	934.32	934.32	931.26	927.18	921.06	912.90	903.72	893.52	882.30	869.04
25	941.46	940.44	937.38	932.28	925.14	914.94	903.72	889.44	873.12	855.78
30	932.28	931.26	928.20	923.10	914.94	904.74	891.48	875.16	855.78	835.38
35	902.70	902.70	899.64	894.54	886.38	875.16	861.90	845.58	826.20	801.72
40	847.62	846.60	844.56	840.48	834.36	826.20	813.96	797.64	777.24	753.78
45	766.02	766.02	763.98	761.94	757.86	750.72	741.54	727.26	709.92	687.48
50	658.92	658.92	658.92	657.90	655.86	651.78	645.66	635.46	619.14	599.76
55	537.54	537.54	538.56	538.56	537.54	535.50	531.42	524.28	513.06	496.74
60	415.14	415.14	415.14	416.16	416.16	415.14	412.08	406.98	397.80	386.58
65	301.92	301.92	302.94	302.94	302.94	302.94	300.90	296.82	290.70	281.52
70	206.04	206.04	206.04	207.06	207.06	206.04	205.02	201.96	196.86	191.76
75	129.54	129.54	129.54	130.56	129.54	129.54	128.52	126.48	123.42	119.34
80	72.42	72.42	72.42	72.42	71.40	71.40	70.38	68.34	67.32	64.26
85	29.58	29.58	29.58	29.58	29.58	28.56	28.56	27.54	26.52	25.50
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	50	55	60	65	70	75	80	85	90
0	879.24	879.24	879.24	879.24	879.24	879.24	879.24	879.24	879.24
5	878.22	877.20	877.20	876.18	875.16	875.16	875.16	874.14	874.14
10	874.14	870.06	867.00	862.92	860.88	857.82	856.80	854.76	854.76
15	865.98	857.82	849.66	841.50	834.36	829.26	825.18	822.12	821.10
20	854.76	840.48	826.20	812.94	800.70	790.50	783.36	778.26	777.24
25	836.40	817.02	796.62	776.22	758.88	744.60	732.36	726.24	723.18
30	810.90	785.40	759.90	733.38	710.94	691.56	676.26	667.08	664.02
35	774.18	744.60	714.00	684.42	656.88	634.44	616.08	604.86	600.78
40	725.22	693.60	660.96	628.32	598.74	572.22	553.86	541.62	537.54
45	659.94	629.34	595.68	564.06	534.48	510.00	491.64	480.42	476.34
50	575.28	547.74	519.18	490.62	466.14	445.74	430.44	421.26	418.20
55	476.34	453.90	432.48	412.08	393.72	380.46	369.24	363.12	361.08
60	371.28	355.98	341.70	329.46	320.28	313.14	308.04	306.00	304.98
65	272.34	262.14	255.00	248.88	245.82	244.80	243.78	244.80	244.80
70	185.64	180.54	176.46	174.42	173.40	174.42	176.46	177.48	177.48
75	116.28	113.22	111.18	110.16	110.16	110.16	110.16	110.16	110.16
80	62.22	61.20	59.16	59.16	58.14	57.12	56.10	56.10	55.08
85	24.48	23.46	22.44	21.42	21.42	20.40	19.38	19.38	19.38
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_SO_359_S3-BL.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	330.62	N.A.	12.90
0-30	719.69	N.A.	28.10
0-40	1204.28	N.A.	47.00
0-60	2126.31	N.A.	82.90
0-80	2532.79	N.A.	98.80
0-90	2564.04	N.A.	100.00
10-90	2480.18	N.A.	96.70
20-40	873.65	N.A.	34.10
20-50	1374.95	N.A.	53.60
40-70	1197.88	N.A.	46.70
60-80	406.48	N.A.	15.90
70-80	130.63	N.A.	5.10
80-90	31.26	N.A.	1.20
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2564.04	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	83.86
10-20	246.76
20-30	389.07
30-40	484.59
40-50	501.30
50-60	420.73
60-70	275.84
70-80	130.63
80-90	31.26
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_SO_359_S3-BL.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	93	95	92	90	91	89	87	85
2	100	92	85	80	97	90	84	79	87	81	77	83	79	75	80	77	74	72
3	91	81	73	67	89	79	72	66	76	70	65	74	68	64	71	67	63	61
4	84	72	63	57	81	71	63	56	68	61	56	66	60	55	64	58	54	52
5	77	64	55	49	75	63	55	49	61	54	48	59	53	48	57	52	47	45
6	71	58	49	43	69	57	49	43	55	48	42	53	47	42	52	46	41	39
7	66	52	44	38	64	52	43	38	50	43	37	49	42	37	47	41	37	35
8	61	48	39	34	60	47	39	33	46	38	33	45	38	33	43	37	33	31
9	57	44	36	30	56	43	35	30	42	35	30	41	34	30	40	34	30	28
10	54	40	33	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25

POLAR GRAPH

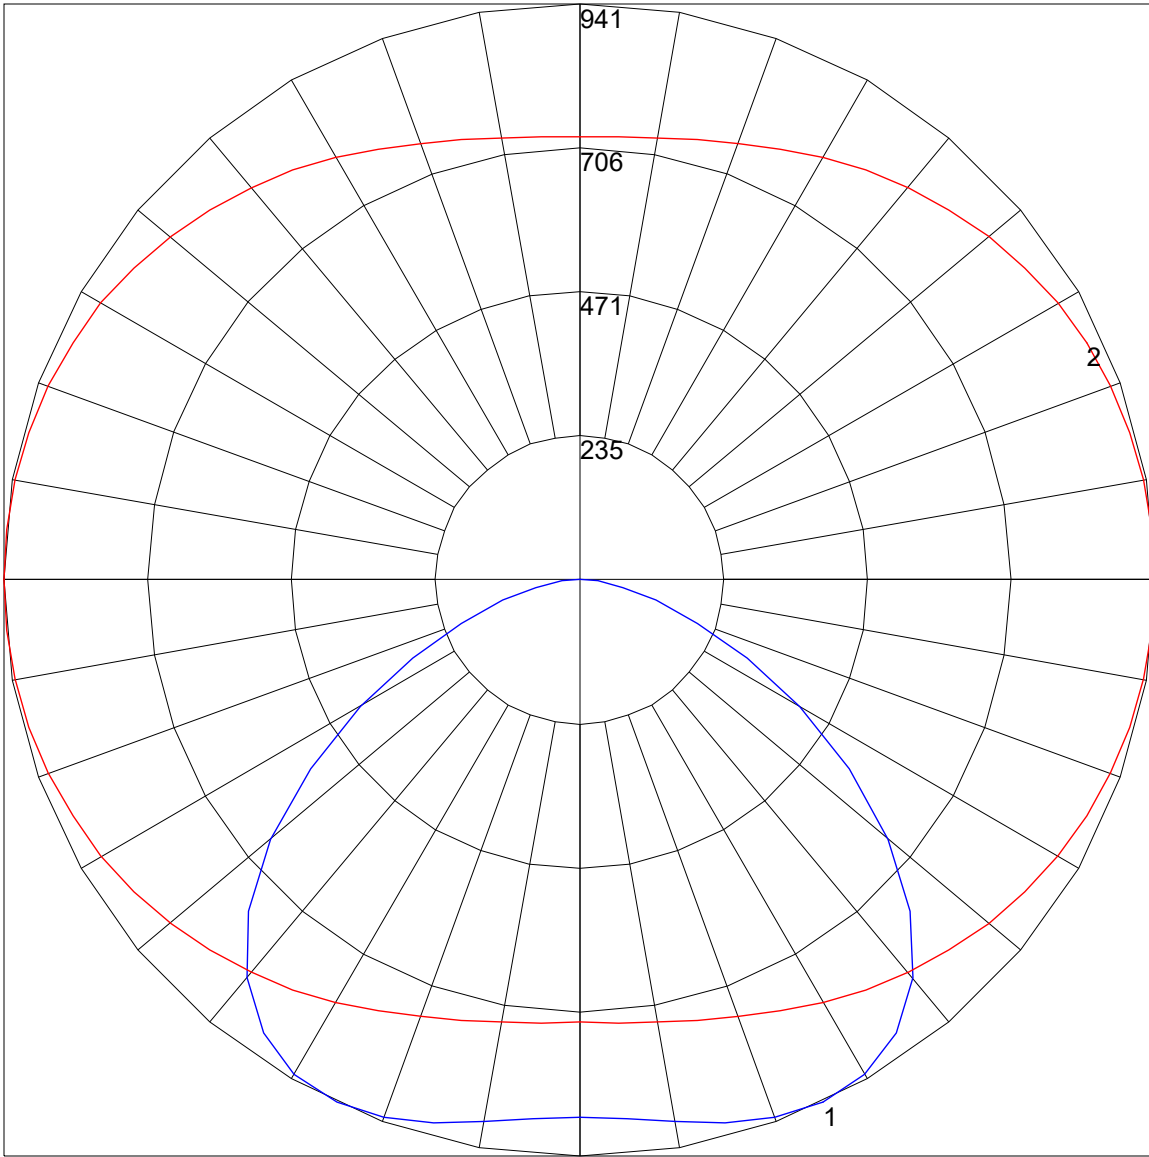

Maximum Candela = 941.46 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)