

IES Report

ZipTwo® | 707 | 120° Symmetric | 80 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-35-S3-X-BL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	108	112	114	116
Total Lumens, 4' rail length (1219mm)	4238	4372	4461	4551
Lumens per foot (305mm)	1060	1093	1115	1138
Input Power (W), 4' rail length (1219mm)	39.4	39.4	39.4	39.4
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_HO_35_S3-BL.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L071704230 (SOURCE REPORT FOR REFERENCE)
 [TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB
 [ISSUEDATE] 11/1/2017
 [MANUFAC] Vode Lighting
 [LUMCAT] 707-Z2-48-Z-HO-35-S3-BL
 [LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, zipper board,
 [MORE] 120° black symmetric lens, high output
 [TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	4449
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	113
Total Luminaire Watts	39.36
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.54
Spacing Criterion (90-270)	1.14
Spacing Criterion (Diagonal)	1.48
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.02 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	62860	56415	39089
55	54380	50253	36529
65	41454	38653	33611
75	29042	26755	24697
85	19693	16977	12903

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74
5	1534.59	1532.82	1532.82	1532.82	1531.05	1531.05	1529.28	1529.28	1527.51	1525.74
10	1561.14	1559.37	1557.60	1555.83	1552.29	1546.98	1543.44	1536.36	1531.05	1523.97
15	1594.77	1593.00	1589.46	1585.92	1578.84	1568.22	1557.60	1545.21	1532.82	1518.66
20	1621.32	1621.32	1616.01	1608.93	1598.31	1584.15	1568.22	1550.52	1531.05	1508.04
25	1633.71	1631.94	1626.63	1617.78	1605.39	1587.69	1568.22	1543.44	1515.12	1485.03
30	1617.78	1616.01	1610.70	1601.85	1587.69	1569.99	1546.98	1518.66	1485.03	1449.63
35	1566.45	1566.45	1561.14	1552.29	1538.13	1518.66	1495.65	1467.33	1433.70	1391.22
40	1470.87	1469.10	1465.56	1458.48	1447.86	1433.70	1412.46	1384.14	1348.74	1308.03
45	1329.27	1329.27	1325.73	1322.19	1315.11	1302.72	1286.79	1262.01	1231.92	1192.98
50	1143.42	1143.42	1143.42	1141.65	1138.11	1131.03	1120.41	1102.71	1074.39	1040.76
55	932.79	932.79	934.56	934.56	932.79	929.25	922.17	909.78	890.31	861.99
60	720.39	720.39	720.39	722.16	722.16	720.39	715.08	706.23	690.30	670.83
65	523.92	523.92	525.69	525.69	525.69	525.69	522.15	515.07	504.45	488.52
70	357.54	357.54	357.54	359.31	359.31	357.54	355.77	350.46	341.61	332.76
75	224.79	224.79	224.79	226.56	224.79	224.79	223.02	219.48	214.17	207.09
80	125.67	125.67	125.67	125.67	123.90	123.90	122.13	118.59	116.82	111.51
85	51.33	51.33	51.33	51.33	51.33	49.56	49.56	47.79	46.02	44.25
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74	1525.74
5	1523.97	1522.20	1522.20	1520.43	1518.66	1518.66	1518.66	1516.89	1516.89
10	1516.89	1509.81	1504.50	1497.42	1493.88	1488.57	1486.80	1483.26	1483.26
15	1502.73	1488.57	1474.41	1460.25	1447.86	1439.01	1431.93	1426.62	1424.85
20	1483.26	1458.48	1433.70	1410.69	1389.45	1371.75	1359.36	1350.51	1348.74
25	1451.40	1417.77	1382.37	1346.97	1316.88	1292.10	1270.86	1260.24	1254.93
30	1407.15	1362.90	1318.65	1272.63	1233.69	1200.06	1173.51	1157.58	1152.27
35	1343.43	1292.10	1239.00	1187.67	1139.88	1100.94	1069.08	1049.61	1042.53
40	1258.47	1203.60	1146.96	1090.32	1038.99	992.97	961.11	939.87	932.79
45	1145.19	1092.09	1033.68	978.81	927.48	885.00	853.14	833.67	826.59
50	998.28	950.49	900.93	851.37	808.89	773.49	746.94	731.01	725.70
55	826.59	787.65	750.48	715.08	683.22	660.21	640.74	630.12	626.58
60	644.28	617.73	592.95	571.71	555.78	543.39	534.54	531.00	529.23
65	472.59	454.89	442.50	431.88	426.57	424.80	423.03	424.80	424.80
70	322.14	313.29	306.21	302.67	300.90	302.67	306.21	307.98	307.98
75	201.78	196.47	192.93	191.16	191.16	191.16	191.16	191.16	191.16
80	107.97	106.20	102.66	102.66	100.89	99.12	97.35	97.35	95.58
85	42.48	40.71	38.94	37.17	37.17	35.40	33.63	33.63	33.63
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_HO_35_S3-BL.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	573.73	N.A.	12.90
0-30	1248.87	N.A.	28.10
0-40	2089.77	N.A.	47.00
0-60	3689.77	N.A.	82.90
0-80	4395.13	N.A.	98.80
0-90	4449.37	N.A.	100.00
10-90	4303.84	N.A.	96.70
20-40	1516.05	N.A.	34.10
20-50	2385.95	N.A.	53.60
40-70	2078.67	N.A.	46.70
60-80	705.36	N.A.	15.90
70-80	226.69	N.A.	5.10
80-90	54.24	N.A.	1.20
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	4449.37	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	145.53
10-20	428.20
20-30	675.14
30-40	840.90
40-50	869.90
50-60	730.10
60-70	478.67
70-80	226.69
80-90	54.24
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_HO_35_S3-BL.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	93	95	92	90	91	89	87	85
2	100	92	85	80	97	90	84	79	87	81	77	83	79	75	80	77	74	72
3	91	81	73	67	89	79	72	66	76	70	65	74	68	64	71	67	63	61
4	84	72	63	57	81	71	63	56	68	61	56	66	60	55	64	58	54	52
5	77	64	55	49	75	63	55	49	61	54	48	59	53	48	57	52	47	45
6	71	58	49	43	69	57	49	43	55	48	42	53	47	42	52	46	41	39
7	66	52	44	38	64	52	43	38	50	43	37	49	42	37	47	41	37	35
8	61	48	39	34	60	47	39	33	46	38	33	45	38	33	43	37	33	31
9	57	44	36	30	56	43	35	30	42	35	30	41	34	30	40	34	30	28
10	54	40	33	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25

POLAR GRAPH

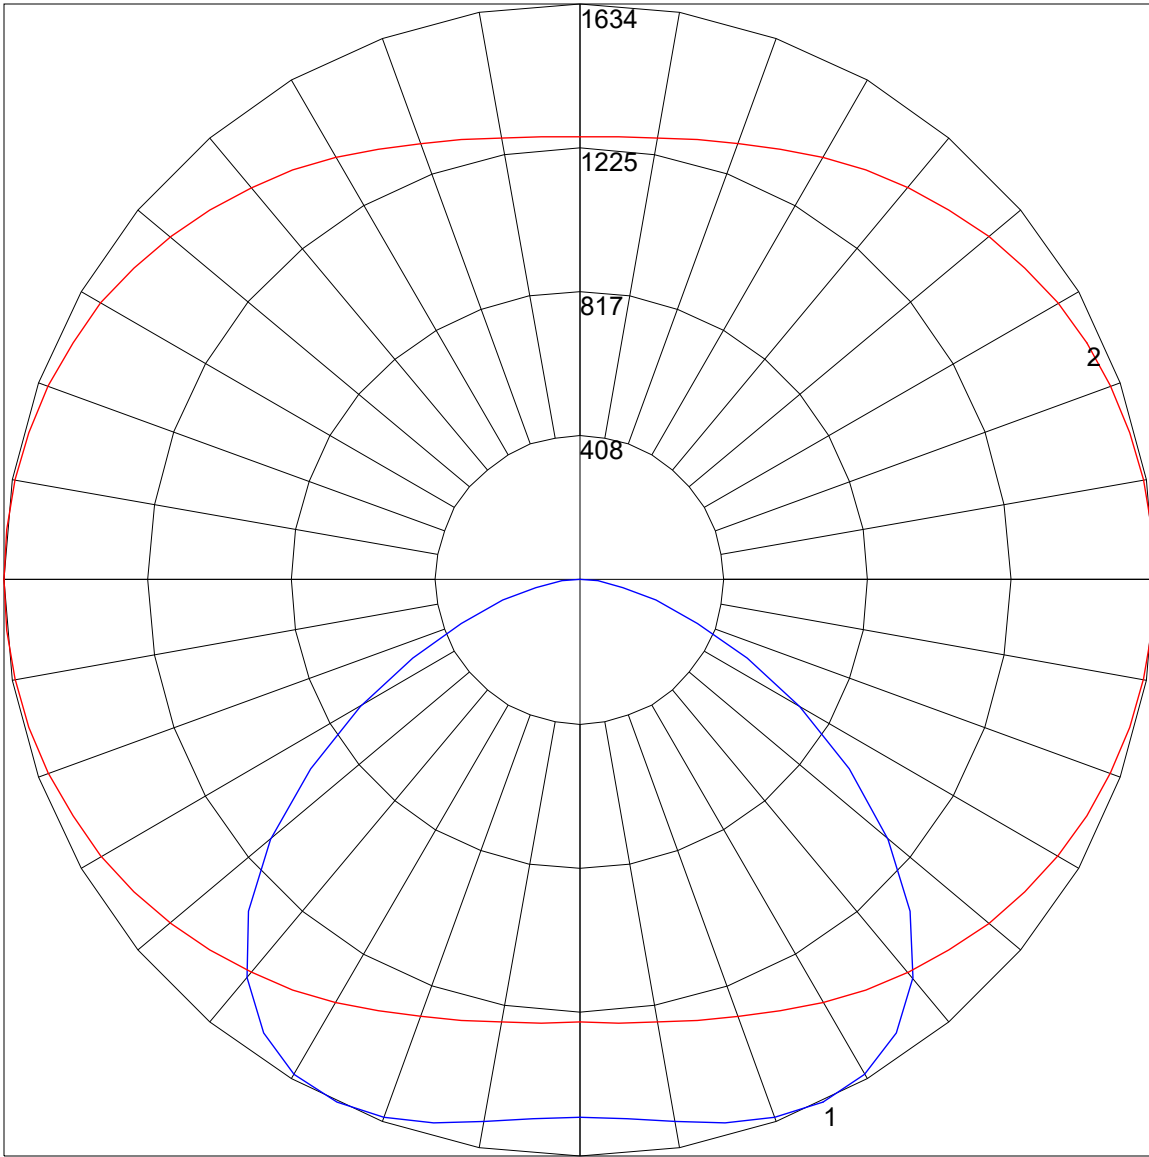

Maximum Candela = 1633.71 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)