

IES Report

ZipTwo® | 707 | 120° Symmetric | 80 CRI | HO

707-Z2-4-48-XX-XX-X-0-Z-HO-35-S3-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	113	116	119	121
Total Lumens, 4' rail length (1219mm)	4425	4565	4658	4751
Lumens per foot (305mm)	1106	1141	1165	1188
Input Power (W), 4' rail length (1219mm)	39.4	39.4	39.4	39.4
Watts per foot (305mm)	9.9	9.9	9.9	9.9
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_HO_35_S3.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L091700102 (SOURCE REPORT FOR REFERENCE)
[TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB
[ISSUEDATE] 11/1/2017
[MANUFAC] Vode Lighting
[LUMCAT] 707-Z2-48-Z-HO-35-S3-AL
[LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, zipper board,
[MORE] 120° white symmetric lens, high output
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	4752
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	121
Total Luminaire Watts	39.36
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.54
Spacing Criterion (90-270)	1.14
Spacing Criterion (Diagonal)	1.50
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.06 ft
Luminous Width (90-270)	4.02 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	89282	79730	55328
55	78703	71940	52235
65	61557	56493	47948
75	44185	39793	35917
85	27624	23020	19183

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5
5	1624.5	1624.5	1623.0	1623.0	1621.5	1620.0	1618.5	1617.0	1614.0	1612.5
10	1654.5	1654.5	1653.0	1650.0	1645.5	1639.5	1633.5	1627.5	1618.5	1611.0
15	1690.5	1689.0	1686.0	1680.0	1672.5	1662.0	1650.0	1636.5	1621.5	1605.0
20	1716.0	1714.5	1708.5	1701.0	1690.5	1675.5	1659.0	1639.5	1617.0	1593.0
25	1725.0	1723.5	1717.5	1708.5	1693.5	1677.0	1656.0	1629.0	1600.5	1567.5
30	1708.5	1705.5	1699.5	1689.0	1674.0	1654.5	1630.5	1602.0	1567.5	1528.5
35	1656.0	1654.5	1648.5	1638.0	1624.5	1605.0	1579.5	1548.0	1512.0	1468.5
40	1560.0	1558.5	1554.0	1545.0	1533.0	1516.5	1494.0	1464.0	1426.5	1383.0
45	1416.0	1416.0	1413.0	1407.0	1398.0	1384.5	1366.5	1339.5	1306.5	1264.5
50	1228.5	1228.5	1227.0	1224.0	1219.5	1210.5	1195.5	1176.0	1146.0	1110.0
55	1012.5	1012.5	1012.5	1011.0	1008.0	1003.5	994.5	978.0	955.5	925.5
60	790.5	790.5	790.5	790.5	789.0	786.0	778.5	768.0	750.0	727.5
65	583.5	583.5	583.5	583.5	582.0	579.0	574.5	565.5	552.0	535.5
70	403.5	403.5	403.5	403.5	402.0	400.5	396.0	388.5	379.5	369.0
75	256.5	256.5	256.5	256.5	255.0	253.5	250.5	246.0	238.5	231.0
80	142.5	142.5	142.5	142.5	141.0	139.5	136.5	133.5	130.5	126.0
85	54.0	54.0	54.0	54.0	52.5	52.5	51.0	49.5	48.0	45.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Vert. Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5	1612.5
5	1611.0	1608.0	1606.5	1605.0	1603.5	1602.0	1600.5	1600.5	1600.5
10	1603.5	1594.5	1587.0	1581.0	1573.5	1569.0	1566.0	1563.0	1561.5
15	1588.5	1572.0	1555.5	1540.5	1527.0	1515.0	1507.5	1501.5	1500.0
20	1566.0	1539.0	1513.5	1486.5	1464.0	1444.5	1429.5	1420.5	1417.5
25	1533.0	1495.5	1458.0	1422.0	1389.0	1359.0	1338.0	1324.5	1320.0
30	1485.0	1437.0	1390.5	1344.0	1300.5	1264.5	1236.0	1219.5	1213.5
35	1419.0	1365.0	1309.5	1254.0	1204.5	1159.5	1128.0	1107.0	1101.0
40	1330.5	1272.0	1212.0	1150.5	1098.0	1050.0	1017.0	996.0	988.5
45	1213.5	1156.5	1095.0	1035.0	982.5	939.0	906.0	885.0	877.5
50	1063.5	1012.5	958.5	906.0	861.0	823.5	796.5	778.5	772.5
55	888.0	846.0	804.0	765.0	733.5	706.5	687.0	675.0	672.0
60	699.0	669.0	642.0	618.0	600.0	585.0	574.5	570.0	567.0
65	517.5	499.5	484.5	472.5	463.5	459.0	456.0	454.5	454.5
70	357.0	346.5	339.0	333.0	331.5	330.0	330.0	330.0	330.0
75	225.0	219.0	214.5	211.5	210.0	208.5	208.5	208.5	208.5
80	121.5	118.5	115.5	114.0	112.5	111.0	109.5	108.0	108.0
85	43.5	42.0	40.5	40.5	39.0	39.0	37.5	37.5	37.5
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_HO_35_S3.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	606.30	N.A.	12.80
0-30	1318.62	N.A.	27.70
0-40	2206.67	N.A.	46.40
0-60	3916.3	N.A.	82.40
0-80	4693.14	N.A.	98.80
0-90	4752.44	N.A.	100.00
10-90	4598.61	N.A.	96.80
20-40	1600.37	N.A.	33.70
20-50	2524.39	N.A.	53.10
40-70	2233.84	N.A.	47.00
60-80	776.84	N.A.	16.30
70-80	252.62	N.A.	5.30
80-90	59.30	N.A.	1.20
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	4752.44	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	153.83
10-20	452.48
20-30	712.31
30-40	888.05
40-50	924.02
50-60	785.60
60-70	524.22
70-80	252.62
80-90	59.30
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_707_Z2_HO_35_S3.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	95	98	95	92	94	92	90	91	89	87	85
2	100	92	85	80	97	90	84	79	86	81	77	83	79	75	80	77	73	71
3	91	81	73	66	89	79	72	66	76	70	65	73	68	64	71	66	62	60
4	83	72	63	56	81	70	62	56	68	61	55	65	59	54	63	58	54	52
5	77	64	55	49	75	63	55	48	61	53	48	59	52	47	57	51	47	45
6	71	58	49	42	69	57	48	42	55	47	42	53	46	41	52	46	41	39
7	66	52	43	37	64	51	43	37	50	42	37	48	42	37	47	41	36	34
8	61	48	39	33	59	47	39	33	46	38	33	44	38	33	43	37	33	31
9	57	44	35	30	56	43	35	30	42	35	30	41	34	29	40	34	29	27
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25

POLAR GRAPH

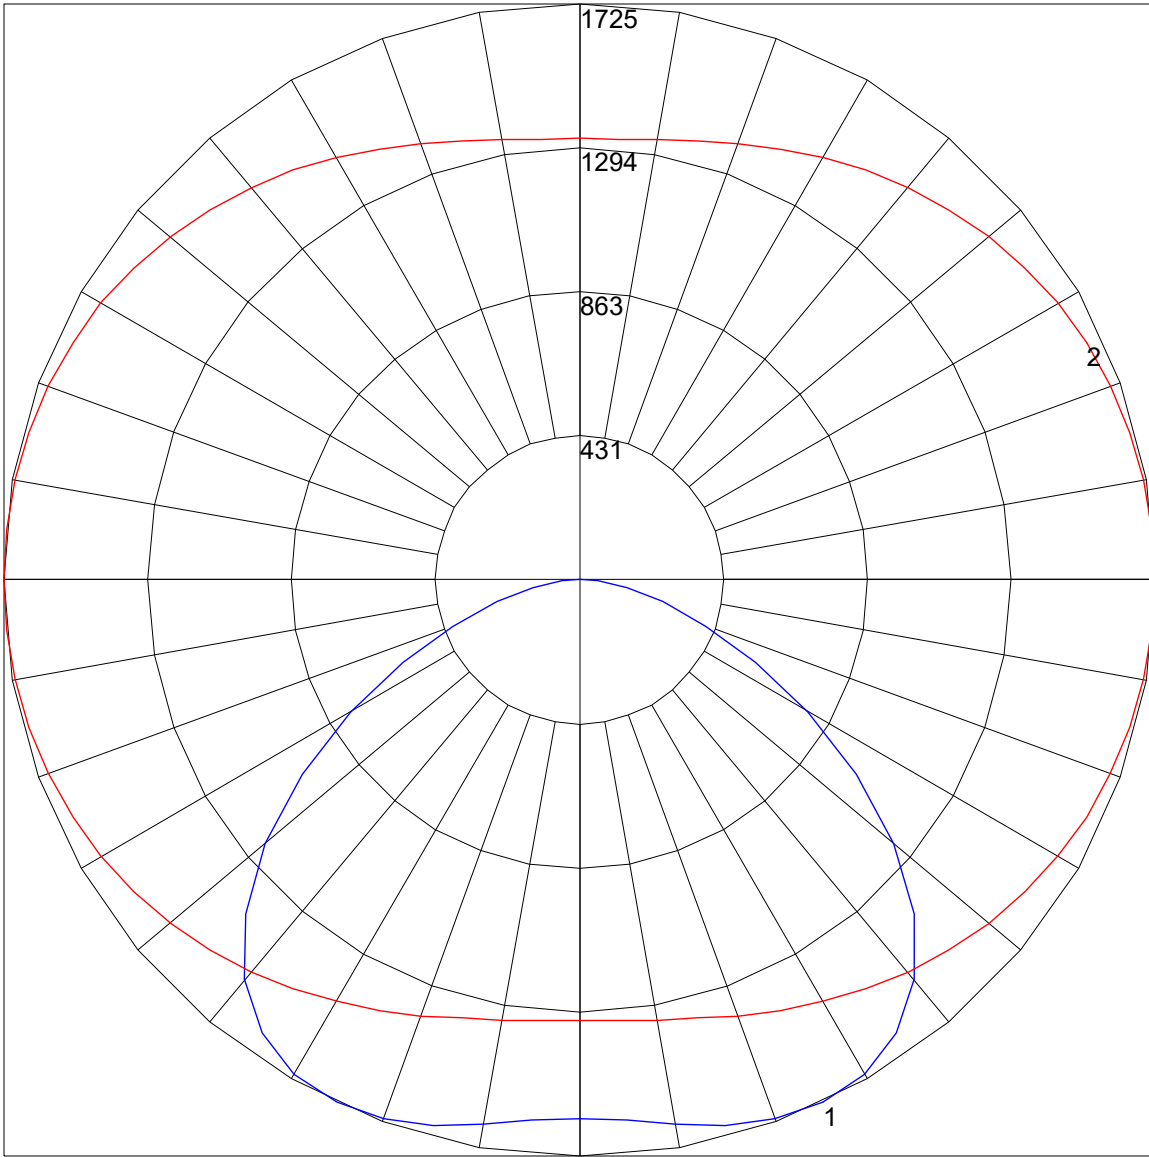

Maximum Candela = 1725 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)