

IES Report

ZipTwo® | 707 | 120° Symmetric | 80 CRI | LO

707-Z2-4-48-XX-XX-X-0-Z-LO-35-S3-X-WH-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	94	97	98	98
Total Lumens, 4' rail length (1219mm)	1521	1568	1584	1584
Lumens per foot (305mm)	380	392	396	396
Input Power (W), 4' rail length (1219mm)	16.3	16.3	16.3	16.3
Watts per foot (305mm)	4.1	4.1	4.1	4.1
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_35\_S3.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
 [TEST] L091700102 (SOURCE REPORT FOR REFERENCE)  
 [TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB  
 [ISSUEDATE] 11/1/2017  
 [MANUFAC] Vode Lighting  
 [LUMCAT] 707-Z2-48-Z-LO-35-S3-AL  
 [LUMINAIRE] ZipTwo LED, 48", 3500K, 80 CRI, zipper board,  
 [MORE] 120° white symmetric lens, low output  
 [TEST PROCEDURE] IESNA:LM-79-08

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1584
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	97
Total Luminaire Watts	16.25
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.54
Spacing Criterion (90-270)	1.14
Spacing Criterion (Diagonal)	1.50
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.06 ft
Luminous Width (90-270)	4.02 ft
Luminous Height	0.00 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	29761	26577	18443
55	26234	23980	17412
65	20519	18831	15983
75	14728	13264	11972
85	9208	7673	6394

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_35\_S3.IES**

**CANDELA TABULATION**

	<b>0</b>	<b>5</b>	<b>10</b>	<b>15</b>	<b>20</b>	<b>25</b>	<b>30</b>	<b>35</b>	<b>40</b>	<b>45</b>
<b>0</b>	537.5	537.5	537.5	537.5	537.5	537.5	537.5	537.5	537.5	537.5
<b>5</b>	541.5	541.5	541.0	541.0	540.5	540.0	539.5	539.0	538.0	537.5
<b>10</b>	551.5	551.5	551.0	550.0	548.5	546.5	544.5	542.5	539.5	537.0
<b>15</b>	563.5	563.0	562.0	560.0	557.5	554.0	550.0	545.5	540.5	535.0
<b>20</b>	572.0	571.5	569.5	567.0	563.5	558.5	553.0	546.5	539.0	531.0
<b>25</b>	575.0	574.5	572.5	569.5	564.5	559.0	552.0	543.0	533.5	522.5
<b>30</b>	569.5	568.5	566.5	563.0	558.0	551.5	543.5	534.0	522.5	509.5
<b>35</b>	552.0	551.5	549.5	546.0	541.5	535.0	526.5	516.0	504.0	489.5
<b>40</b>	520.0	519.5	518.0	515.0	511.0	505.5	498.0	488.0	475.5	461.0
<b>45</b>	472.0	472.0	471.0	469.0	466.0	461.5	455.5	446.5	435.5	421.5
<b>50</b>	409.5	409.5	409.0	408.0	406.5	403.5	398.5	392.0	382.0	370.0
<b>55</b>	337.5	337.5	337.5	337.0	336.0	334.5	331.5	326.0	318.5	308.5
<b>60</b>	263.5	263.5	263.5	263.5	263.0	262.0	259.5	256.0	250.0	242.5
<b>65</b>	194.5	194.5	194.5	194.5	194.0	193.0	191.5	188.5	184.0	178.5
<b>70</b>	134.5	134.5	134.5	134.5	134.0	133.5	132.0	129.5	126.5	123.0
<b>75</b>	85.5	85.5	85.5	85.5	85.0	84.5	83.5	82.0	79.5	77.0
<b>80</b>	47.5	47.5	47.5	47.5	47.0	46.5	45.5	44.5	43.5	42.0
<b>85</b>	18.0	18.0	18.0	18.0	17.5	17.5	17.0	16.5	16.0	15.0
<b>90</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**Vert. Angles**      **Horizontal Angles**

	<b>50</b>	<b>55</b>	<b>60</b>	<b>65</b>	<b>70</b>	<b>75</b>	<b>80</b>	<b>85</b>	<b>90</b>
<b>0</b>	537.5	537.5	537.5	537.5	537.5	537.5	537.5	537.5	537.5
<b>5</b>	537.0	536.0	535.5	535.0	534.5	534.0	533.5	533.5	533.5
<b>10</b>	534.5	531.5	529.0	527.0	524.5	523.0	522.0	521.0	520.5
<b>15</b>	529.5	524.0	518.5	513.5	509.0	505.0	502.5	500.5	500.0
<b>20</b>	522.0	513.0	504.5	495.5	488.0	481.5	476.5	473.5	472.5
<b>25</b>	511.0	498.5	486.0	474.0	463.0	453.0	446.0	441.5	440.0
<b>30</b>	495.0	479.0	463.5	448.0	433.5	421.5	412.0	406.5	404.5
<b>35</b>	473.0	455.0	436.5	418.0	401.5	386.5	376.0	369.0	367.0
<b>40</b>	443.5	424.0	404.0	383.5	366.0	350.0	339.0	332.0	329.5
<b>45</b>	404.5	385.5	365.0	345.0	327.5	313.0	302.0	295.0	292.5
<b>50</b>	354.5	337.5	319.5	302.0	287.0	274.5	265.5	259.5	257.5
<b>55</b>	296.0	282.0	268.0	255.0	244.5	235.5	229.0	225.0	224.0
<b>60</b>	233.0	223.0	214.0	206.0	200.0	195.0	191.5	190.0	189.0
<b>65</b>	172.5	166.5	161.5	157.5	154.5	153.0	152.0	151.5	151.5
<b>70</b>	119.0	115.5	113.0	111.0	110.5	110.0	110.0	110.0	110.0
<b>75</b>	75.0	73.0	71.5	70.5	70.0	69.5	69.5	69.5	69.5
<b>80</b>	40.5	39.5	38.5	38.0	37.5	37.0	36.5	36.0	36.0
<b>85</b>	14.5	14.0	13.5	13.5	13.0	13.0	12.5	12.5	12.5
<b>90</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_35\_S3.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	202.10	N.A.	12.80
0-30	439.54	N.A.	27.70
0-40	735.56	N.A.	46.40
0-60	1305.43	N.A.	82.40
0-80	1564.38	N.A.	98.80
0-90	1584.15	N.A.	100.00
10-90	1532.87	N.A.	96.80
20-40	533.46	N.A.	33.70
20-50	841.46	N.A.	53.10
40-70	744.61	N.A.	47.00
60-80	258.95	N.A.	16.30
70-80	84.21	N.A.	5.30
80-90	19.77	N.A.	1.20
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1584.15	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	51.28
10-20	150.83
20-30	237.44
30-40	296.02
40-50	308.01
50-60	261.87
60-70	174.74
70-80	84.21
80-90	19.77
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z2\_LO\_35\_S3.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	95	98	95	92	94	92	90	91	89	87	85
2	100	92	85	80	97	90	84	79	86	81	77	83	79	75	80	77	73	71
3	91	81	73	66	89	79	72	66	76	70	65	73	68	64	71	66	62	60
4	83	72	63	56	81	70	62	56	68	61	55	65	59	54	63	58	54	52
5	77	64	55	49	75	63	55	48	61	53	48	59	52	47	57	51	47	45
6	71	58	49	42	69	57	48	42	55	47	42	53	46	41	52	46	41	39
7	66	52	43	37	64	51	43	37	50	42	37	48	42	37	47	41	36	34
8	61	48	39	33	59	47	39	33	46	38	33	44	38	33	43	37	33	31
9	57	44	35	30	56	43	35	30	42	35	30	41	34	29	40	34	29	27
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25

POLAR GRAPH

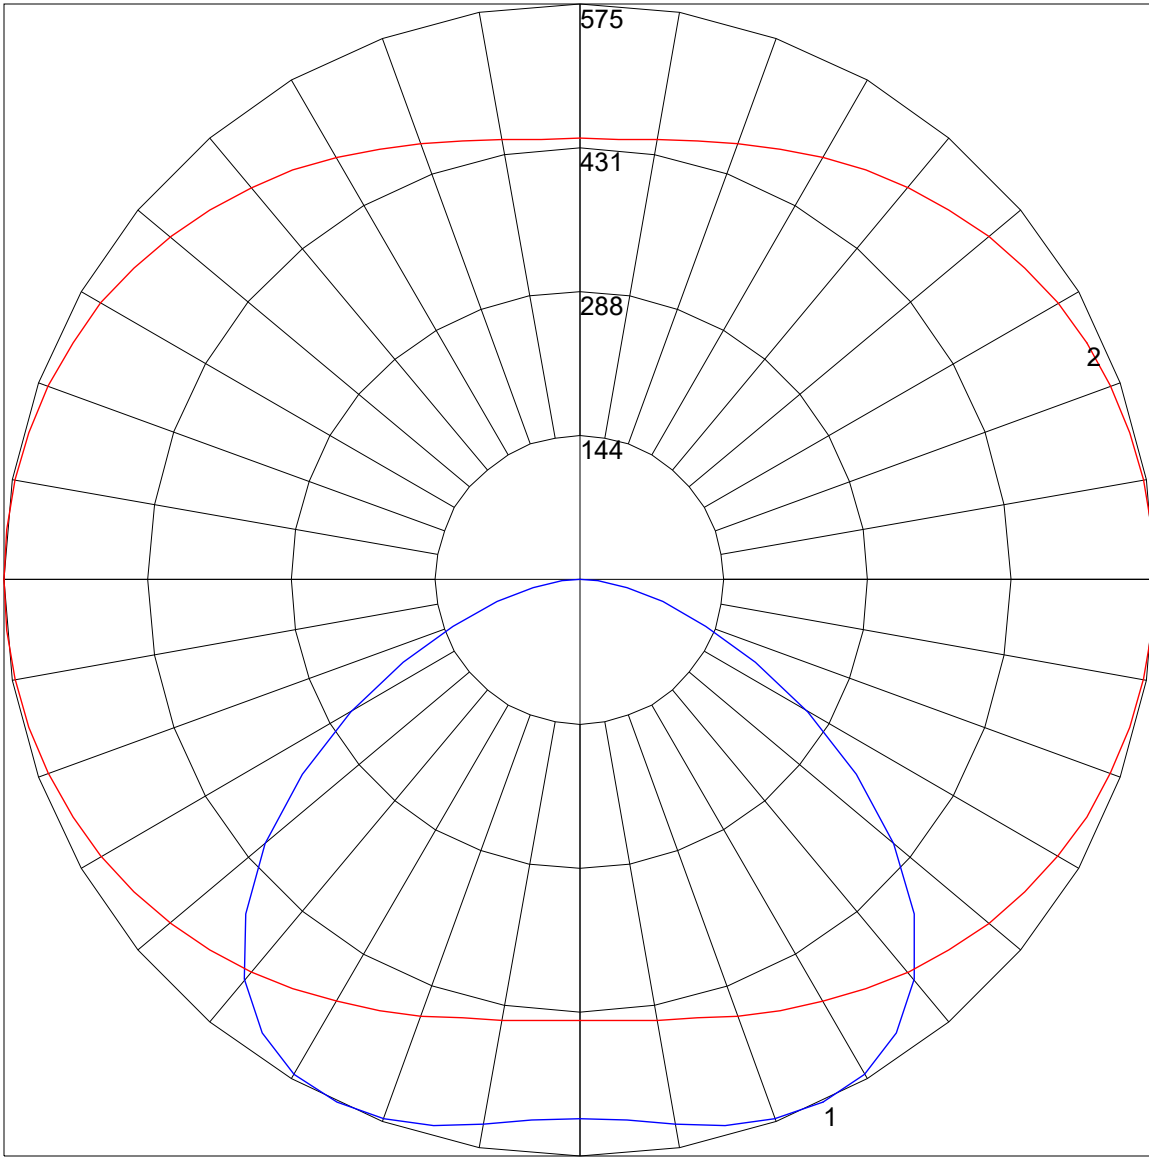

Maximum Candela = 575 Located At Horizontal Angle = 0, Vertical Angle = 25  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)