

**IES Report**

**ZipTwo® | 707 | 85° Asymmetric | 90 CRI | SO**

**707-Z2-4-48-XX-XX-X-0-Z-SO-359-A1-X-WH-0**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	59	60	62	63
Total Lumens, 4' rail length (1219mm)	1521	1569	1601	1633
Lumens per foot (305mm)	380	392	400	408
Input Power (W), 4' rail length (1219mm)	26.2	26.2	26.2	26.2
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	95	95	95	95

Due to the large number of options in Vode’s product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



8165 E Kaiser Blvd. Anaheim, CA 92808  
www.lightlaboratory.com

Report No: L091700104



**Report No:** L091700104

**Issue Date:** 9/21/2017

**Report Prepared For:** Vode Lighting  
21684 8th Street East, Suite 700, Sonoma, CA 95476

**Model Number:** 707-Z2-48-Z-SO-359-A1-AL

**Test:** Electrical and Photometric tests

**Standards Used:** Appropriate part or all test guidelines were used for test performed:  
*IESNA LM79: 2008* Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products  
*ANSI NEMA ANSLG C78.377: 2008* Specification of the Chromaticity of Solid State Lighting Products  
*ANSI C82.77:2002:* Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

**Description of Sample:** Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

**Testing Condition:** Fixture is tested with no special conditions.

**Sample Arrival Date:** 9/15/17

**Date of Tests:** 9/16/17 - 9/21/17

**Seasoning of Sample:** No seasoning was performed in accordance with IESNA LM-79.

**Equipment List**

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S1	11/28/17
ITECH	IT6122	PS-DC03-S1	11/28/17
Fluke Digital Thermometer	52k/J	MT-TP02-GC	11/28/17
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

\*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

**Test Summary**

<b>Manufacturer:</b>	Vode Lighting
<b>Model Number:</b>	707-Z2-48-Z-SO-359-A1-AL
<b>Driver Model Number:</b>	MEAN WELL HLG-40H-36A
<b>Total Lumens:</b>	1600.65
<b>Input Voltage (VAC/60Hz):</b>	120.00
<b>Input Current (Amp):</b>	0.22
<b>Input Power (W):</b>	26.17
<b>Input Power Factor:</b>	0.99
<b>Current ATHD @ 120V(%):</b>	9%
<b>Current ATHD @ 277V(%):</b>	N/A
<b>Efficacy:</b>	61
<b>Color Rendering Index (CRI):</b>	95
<b>Correlated Color Temperature (K):</b>	3240
<b>Chromaticity Coordinate x:</b>	0.4191
<b>Chromaticity Coordinate y:</b>	0.3940
<b>Ambient Temperature (°C):</b>	25.0
<b>Stabilization Time (Hours):</b>	0:35
<b>Total Operating Time (Hours):</b>	1:25


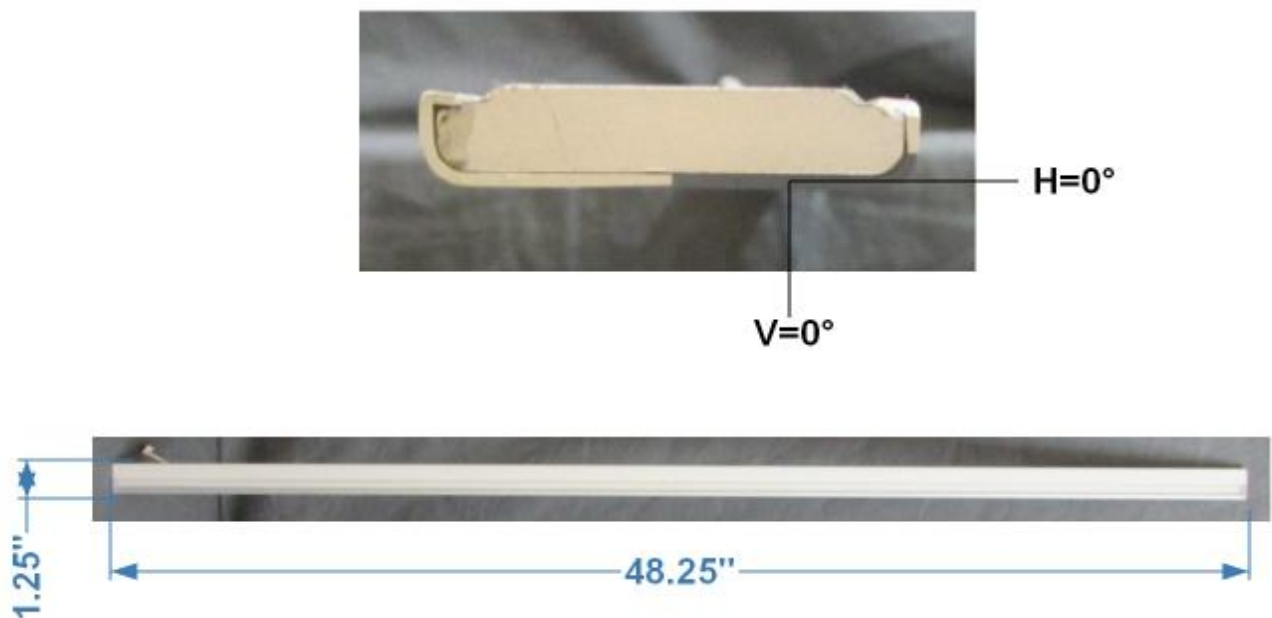


FIG. 1 LUMINAIRE

\*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

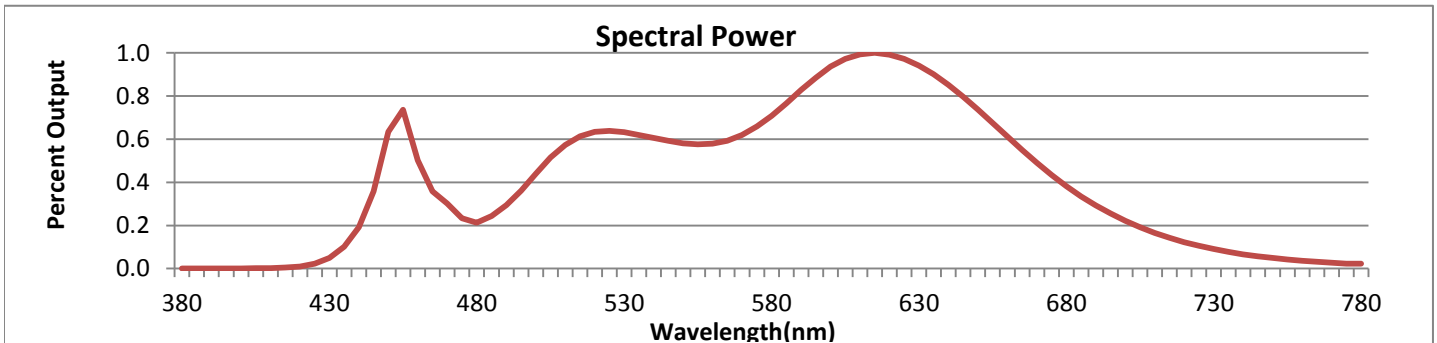


Wavelength	W/m <sup>2</sup> nm	440	0.1921	510	0.5736	580	0.7091	650	0.7385	720	0.1223
380	0.0007	450	0.6335	520	0.6338	590	0.8287	660	0.6130	730	0.0903
390	0.0007	460	0.5025	530	0.6323	600	0.9366	670	0.4895	740	0.0664
400	0.0011	470	0.3015	540	0.6054	610	0.9935	680	0.3822	750	0.0489
410	0.0023	480	0.2126	550	0.5813	620	0.9923	690	0.2924	760	0.0361
420	0.0098	490	0.2941	560	0.5788	630	0.9415	700	0.2209	770	0.0266
430	0.0488	500	0.4403	570	0.6198	640	0.8529	710	0.1654	780	0.0230

**CRI & CCT**

x	0.4191
y	0.3940
u'	0.2433
v'	0.5147
CRI	95.20
CCT	3240
Duv	-0.00134

**R Values**

R1	97.49
R2	98.35
R3	98.71
R4	95.73
R5	97.28
R6	93.33
R7	93.47
R8	87.63
R9	71.60
R10	96.92
R11	88.41
R12	84.12
R13	96.91
R14	98.84

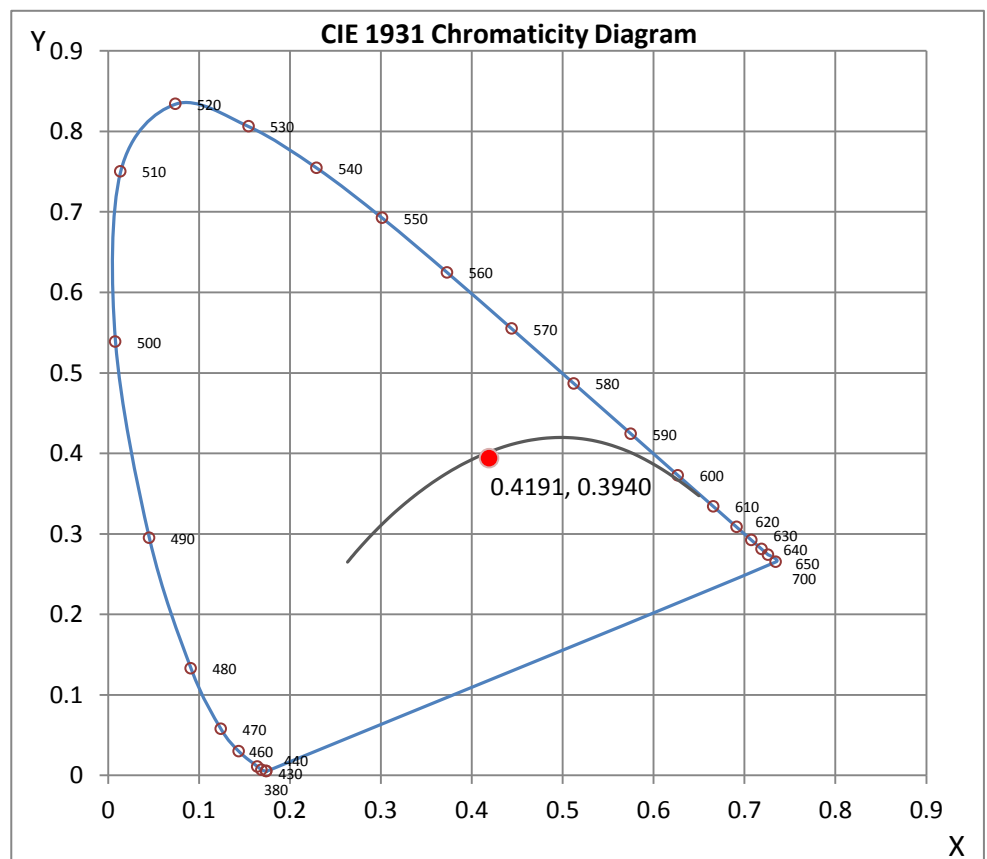

\*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

## Test Methods

### Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

### Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

### Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Keyur Patel

Test Report Released by:



Jeff Ahn  
Engineering Manager

Test Report Reviewed by:



Steve Kang  
Quality Assurance

*\*Attached are photometric data reports. Total number of pages: 10*



8165 E. Kaiser Blvd. Anaheim, CA 92808  
www.lightlaboratory.com

# Photometric Test Report

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L091700104.IES**

## DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002  
[TEST] L091700104  
[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)  
[ISSUEDATE] 9/21/2017  
[MANUFAC] Vode Lighting  
[LUMCAT] 707-Z2-48-Z-SO-359-A1-AL  
[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, zipper board,  
[MORE] 85° white asymmetric lens, standard output  
[BALLASTCAT] MEAN WELL HLG-40H-36A  
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND  
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.  
[INPUT] 120VAC, 26.17W  
[TEST PROCEDURE] IESNA:LM-79-08

## CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1601
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	61
Total Luminaire Watts	26.17
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	2.36
Spacing Criterion (90-270)	1.24
Spacing Criterion (Diagonal)	1.62
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.06 ft
Luminous Width (90-270)	4.02 ft
Luminous Height	0.00 ft

## LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	59079	49623	16241
55	53495	43006	13503
65	44502	34235	11336
75	34444	25733	9126
85	26335	18053	5648

**IES INDOOR REPORT  
PHOTOMETRIC FILENAME : L091700104.IES**

**CANDELA TABULATION**

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0</b>	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81
<b>5</b>	578.93	578.43	576.77	574.12	570.38	565.65	560.25	553.61	546.30	538.41
<b>10</b>	728.73	727.48	723.91	718.10	709.38	699.17	686.71	672.27	655.57	637.89
<b>15</b>	873.88	872.13	867.07	858.43	846.39	830.37	811.60	789.01	763.44	735.87
<b>20</b>	993.29	991.21	985.31	975.27	960.57	941.47	918.88	890.98	858.52	823.31
<b>25</b>	1071.17	1069.01	1063.12	1052.99	1038.37	1018.86	994.86	964.72	928.93	888.99
<b>30</b>	1101.73	1099.74	1094.42	1085.37	1071.75	1052.99	1029.66	1000.18	963.81	922.12
<b>35</b>	1085.79	1084.21	1079.64	1071.67	1059.47	1042.28	1020.94	992.87	957.75	916.73
<b>40</b>	1028.16	1026.91	1023.01	1016.12	1005.49	989.71	969.54	942.96	909.42	870.14
<b>45</b>	936.99	936.16	932.67	926.52	916.48	901.53	882.10	856.52	824.39	787.02
<b>50</b>	820.40	819.49	816.42	810.19	800.47	786.44	767.43	742.18	711.38	676.25
<b>55</b>	688.21	687.38	684.22	678.91	669.44	655.99	637.64	613.64	585.91	553.27
<b>60</b>	552.03	551.45	548.71	543.64	535.34	522.55	505.53	484.69	460.44	432.62
<b>65</b>	421.83	421.33	419.00	414.69	407.71	396.58	382.63	365.11	346.51	324.51
<b>70</b>	304.58	304.16	302.34	298.93	293.29	284.82	274.02	260.74	245.71	230.34
<b>75</b>	199.95	199.70	198.38	195.88	191.82	185.84	178.53	169.48	159.51	149.38
<b>80</b>	114.43	114.09	113.18	111.52	108.94	105.21	100.64	95.24	89.35	83.54
<b>85</b>	51.48	51.32	50.74	49.66	48.24	46.17	43.84	41.02	38.20	35.29
<b>90</b>	19.76	19.68	19.27	18.77	18.02	17.02	16.03	14.70	13.45	12.12

**Vert. Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>	<u>95</u>
<b>0</b>	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81
<b>5</b>	529.86	520.23	510.51	500.63	490.42	479.70	469.32	458.94	447.98	437.85
<b>10</b>	618.87	597.37	576.27	553.77	531.68	508.85	486.84	465.25	443.42	422.82
<b>15</b>	705.90	672.43	639.05	604.76	569.13	533.43	499.72	466.75	434.20	404.06
<b>20</b>	782.79	739.11	694.27	648.10	599.53	551.28	505.78	462.35	419.92	381.30
<b>25</b>	842.16	790.34	736.20	679.41	621.28	559.83	503.70	450.56	399.74	354.48
<b>30</b>	872.55	816.75	756.38	692.11	625.43	554.69	490.42	429.63	372.75	323.93
<b>35</b>	867.15	810.11	747.66	679.90	606.42	534.51	463.18	398.66	339.04	288.89
<b>40</b>	822.06	766.35	705.48	638.30	564.98	493.07	421.66	357.81	299.60	249.94
<b>45</b>	741.43	689.20	632.32	569.88	501.87	432.79	360.55	310.72	257.58	213.32
<b>50</b>	636.06	589.23	537.41	481.11	424.07	360.46	310.14	259.66	214.65	178.53
<b>55</b>	517.90	478.21	435.11	389.03	343.77	295.69	251.19	209.75	173.71	145.98
<b>60</b>	402.56	371.84	338.96	303.50	268.04	231.51	196.80	165.99	139.25	116.42
<b>65</b>	301.51	278.17	253.18	227.35	201.70	176.12	150.88	127.38	107.45	90.26
<b>70</b>	213.82	197.46	180.27	162.42	144.90	127.30	109.69	93.75	79.05	66.93
<b>75</b>	138.75	128.29	117.41	106.29	95.24	84.12	72.82	62.44	52.98	45.01
<b>80</b>	77.39	71.50	65.27	59.29	53.23	47.08	40.77	35.04	29.73	25.49
<b>85</b>	32.38	29.56	26.74	23.92	21.09	18.43	15.61	13.12	11.04	9.55
<b>90</b>	10.71	9.38	7.97	6.48	5.15	3.65	2.33	1.25	0.66	0.75

**Vert. Horizontal Angles**

	<u>100</u>	<u>105</u>	<u>110</u>	<u>115</u>	<u>120</u>	<u>125</u>	<u>130</u>	<u>135</u>	<u>140</u>	<u>145</u>
<b>0</b>	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81	449.81
<b>5</b>	428.05	418.34	408.79	400.24	391.52	383.96	377.07	370.26	364.45	359.30
<b>10</b>	403.48	384.71	367.11	351.41	336.30	323.26	311.39	300.51	290.96	282.91
<b>15</b>	376.57	350.33	326.92	306.24	286.73	270.45	256.17	243.38	232.50	223.37
<b>20</b>	347.09	315.79	288.05	264.72	243.13	225.94	211.25	198.54	188.33	179.77
<b>25</b>	315.79	280.83	251.19	227.02	205.77	189.32	175.96	165.08	156.44	149.30
<b>30</b>	281.08	246.29	216.89	193.81	174.29	160.18	149.05	140.17	133.52	128.38
<b>35</b>	246.29	212.82	185.50	165.16	148.97	136.93	128.21	121.57	116.67	112.93

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L091700104.IES**

**CANDELA TABULATION - (Cont.)**

<b>40</b>	211.74	181.44	158.02	140.75	127.46	118.16	111.35	106.37	102.63	99.89
<b>45</b>	179.77	153.95	134.02	120.07	109.36	102.14	96.90	92.92	90.10	87.94
<b>50</b>	150.55	128.62	112.68	101.64	93.08	87.44	83.20	80.38	78.14	76.39
<b>55</b>	123.56	106.20	93.75	84.86	78.39	73.90	70.58	68.01	66.18	64.85
<b>60</b>	99.23	85.94	76.73	69.83	64.44	60.87	58.13	56.05	54.64	53.48
<b>65</b>	79.05	67.68	60.62	55.22	51.32	48.41	46.25	44.59	43.43	42.43
<b>70</b>	57.79	50.82	45.50	41.52	38.70	36.54	34.96	33.71	32.80	32.05
<b>75</b>	39.11	34.71	31.22	28.65	26.66	25.33	24.16	23.25	22.67	22.17
<b>80</b>	22.34	20.01	18.19	16.77	15.78	14.95	14.37	13.87	13.62	13.20
<b>85</b>	8.64	8.06	7.47	7.06	6.64	6.39	6.23	6.15	6.06	6.06
<b>90</b>	0.83	0.83	0.83	0.83	0.83	0.75	0.75	0.75	0.75	0.58

**Vert. Angles**      **Horizontal Angles**

	<u>150</u>	<u>155</u>	<u>160</u>	<u>165</u>	<u>170</u>	<u>175</u>	<u>180</u>
<b>0</b>	449.81	449.81	449.81	449.81	449.81	449.81	449.81
<b>5</b>	354.98	351.08	348.01	345.35	343.69	342.61	342.28
<b>10</b>	275.85	269.95	265.30	261.48	258.83	257.33	256.75
<b>15</b>	215.81	209.42	204.52	200.62	198.04	196.38	195.97
<b>20</b>	172.63	167.57	163.42	160.18	158.02	156.61	156.28
<b>25</b>	144.15	140.08	137.01	134.69	133.03	132.03	131.86
<b>30</b>	124.56	121.65	119.49	117.91	116.75	116.17	115.92
<b>35</b>	110.11	107.95	106.54	105.46	104.63	104.13	104.13
<b>40</b>	97.73	96.24	95.08	94.25	93.75	93.42	93.33
<b>45</b>	86.36	85.20	84.28	83.78	83.78	83.54	83.37
<b>50</b>	75.15	74.32	73.57	73.16	72.91	72.74	72.74
<b>55</b>	63.86	63.11	62.61	62.19	62.03	61.95	61.95
<b>60</b>	52.73	52.06	51.65	51.32	51.07	50.99	50.99
<b>65</b>	41.85	41.27	40.85	40.61	40.44	40.27	40.19
<b>70</b>	31.47	31.06	30.72	30.47	30.31	30.14	30.23
<b>75</b>	21.76	21.42	21.17	21.01	20.84	20.68	20.76
<b>80</b>	13.04	12.87	12.71	12.62	12.54	12.37	12.46
<b>85</b>	6.06	6.06	6.06	6.06	5.98	5.90	5.98
<b>90</b>	0.58	0.58	0.58	0.58	0.50	0.50	0.50



**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L091700104.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	182.20	N.A.	11.40
0-30	418.67	N.A.	26.20
0-40	725.75	N.A.	45.30
0-60	1305.85	N.A.	81.60
0-80	1574.73	N.A.	98.40
0-90	1600.65	N.A.	100.00
10-90	1556.82	N.A.	97.30
20-40	543.55	N.A.	34.00
20-50	860.39	N.A.	53.80
40-70	757.77	N.A.	47.30
60-80	268.88	N.A.	16.80
70-80	91.21	N.A.	5.70
80-90	25.92	N.A.	1.60
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1600.65	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**


Zone	Lumens
0-10	43.83
10-20	138.38
20-30	236.47
30-40	307.08
40-50	316.85
50-60	263.25
60-70	177.67
70-80	91.21
80-90	25.92
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	84
2	99	91	84	79	97	89	83	78	86	81	76	82	78	74	79	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	67	63	70	66	62	59
4	83	71	62	55	81	70	61	55	67	60	54	65	59	54	63	57	53	51
5	76	63	54	48	74	62	54	47	60	53	47	58	51	46	56	50	46	44
6	70	57	48	41	68	56	47	41	54	46	41	52	46	40	51	45	40	38
7	65	51	43	36	63	51	42	36	49	41	36	48	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	34	29	55	42	34	29	41	34	29	40	33	28	39	33	28	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24

POLAR GRAPH

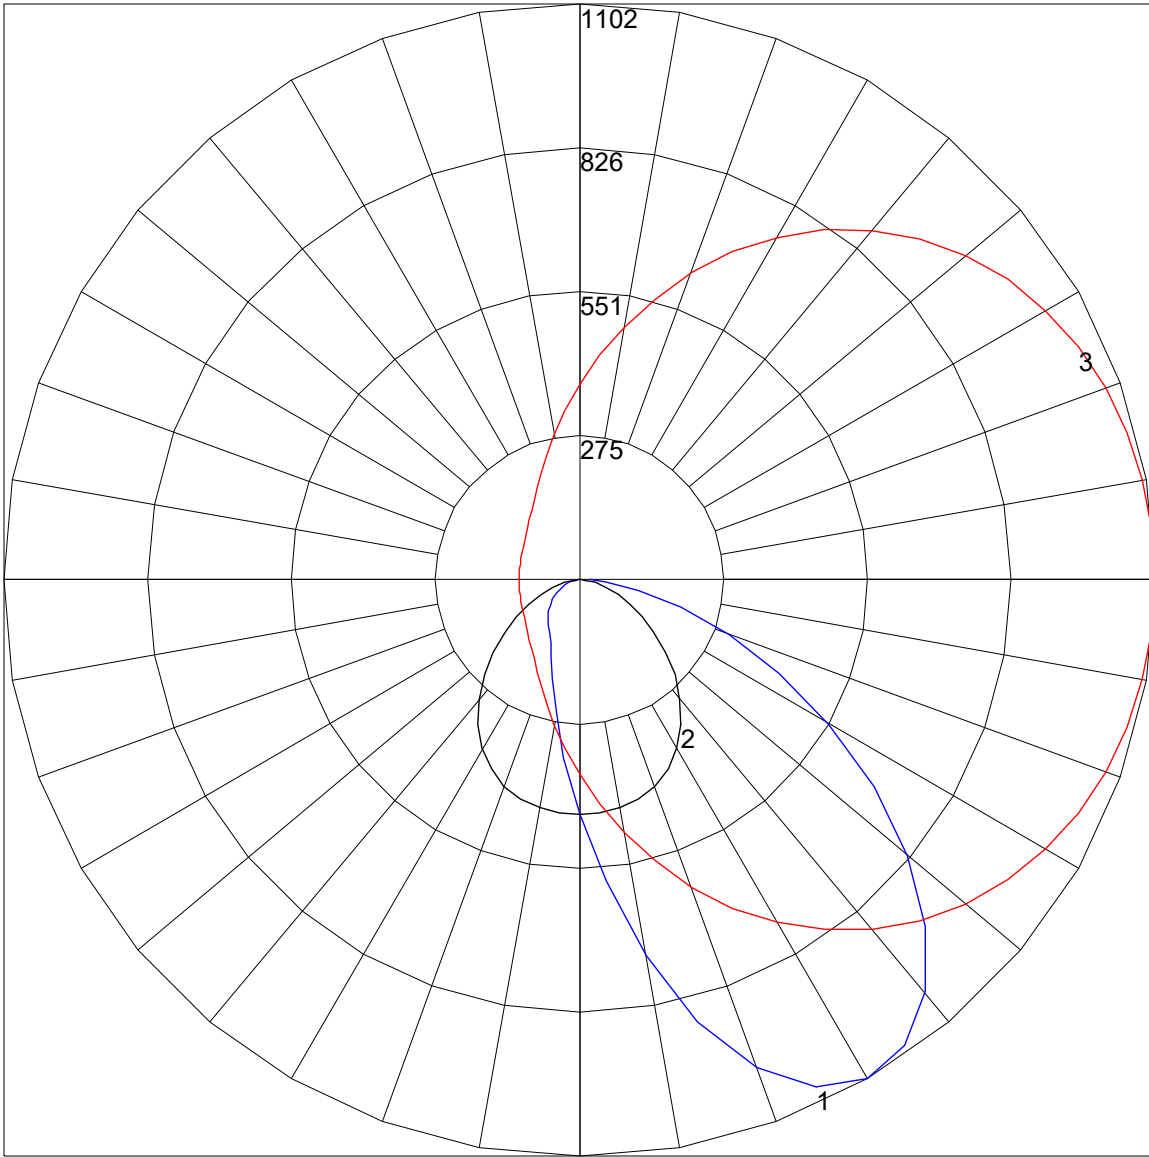

Maximum Candela = 1101.73 Located At Horizontal Angle = 0, Vertical Angle = 30  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Vertical Plane Through Horizontal Angles (90 - 270)  
# 3 - Horizontal Cone Through Vertical Angle (30) (Through Max. Cd.)