

**IES Report**

**ZipWave® | 707 | Clear with EdgeSoft™, fixture in cove | 90 CRI | LO**

**707-Z9-4-48-AW / EW-XX-X-0-Z-LO-359-C1-0-AL-0**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	46	47	48	49
Total Lumens, 4' rail length (1219mm)	734	757	773	788
Lumens per foot (305mm)	184	189	193	197
Input Power (W), 4' rail length (1219mm)	16.25	16.25	16.25	16.25
Watts per foot (305mm)	4.1	4.1	4.1	4.1
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z9\_AW\_LO\_359\_C1\_IN COVE.IES**

**DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
 [TEST] L101707604 (SOURCE REPORT FOR REFERENCE)  
 [TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB  
 [ISSUEDATE] 11/1/2017  
 [MANUFAC] Vode Lighting  
 [LUMCAT] 707-Z9-48-AW-Z-LO-359-C1  
 [LUMINAIRE] ZipWave LED, 48", Armstrong wall cove part no. AXIDLCWKE48, 3500K, 90 CRI,  
 [MORE] zipper board, clear lens w/edge softening, low output  
 [TEST PROCEDURE] IESNA:LM-79-08

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	773
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	48
Total Luminaire Watts	16.25
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	0.38
Spacing Criterion (90-270)	2.24
Spacing Criterion (Diagonal)	3.50
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.00 ft

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	24	451	1949
55	0	586	2637
65	0	716	3777
75	0	779	6168
85	0	1157	14845

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
<b>0</b>	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
<b>5</b>	18.5	18.5	18.5	18.5	19.0	19.0	19.5	20.0	20.0	20.5
<b>10</b>	13.5	13.5	13.5	14.0	14.0	14.5	15.0	15.5	16.5	17.0
<b>15</b>	9.5	9.5	10.0	10.0	10.5	11.0	12.0	12.5	13.0	14.0
<b>20</b>	6.5	6.5	7.0	7.0	8.0	8.5	9.5	10.5	11.5	12.5
<b>25</b>	2.5	2.5	3.0	4.0	5.0	6.0	7.0	8.0	9.5	11.0
<b>30</b>	1.5	1.5	2.0	2.5	3.0	3.5	5.0	6.5	8.0	9.5
<b>35</b>	1.5	1.5	1.5	2.0	3.0	3.5	4.5	5.5	7.0	8.5
<b>40</b>	1.5	1.5	1.5	2.5	3.0	4.0	5.0	6.0	7.5	8.5
<b>45</b>	0.5	1.0	1.5	2.0	3.0	4.0	5.0	6.5	8.0	9.5
<b>50</b>	0.0	0.5	1.0	2.0	3.0	4.0	5.5	6.5	8.5	10.0
<b>55</b>	0.0	0.5	1.0	2.0	3.0	4.0	5.0	6.5	8.5	10.0
<b>60</b>	0.0	0.5	1.0	1.5	2.5	3.5	5.0	6.5	8.0	10.0
<b>65</b>	0.0	0.5	1.0	1.5	2.5	3.0	4.5	5.5	7.0	9.0
<b>70</b>	0.0	0.5	1.0	1.5	2.0	3.0	4.0	5.0	6.5	7.5
<b>75</b>	0.0	1.0	1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0
<b>80</b>	0.0	1.0	1.0	1.0	1.5	2.0	2.0	3.0	3.5	4.5
<b>85</b>	0.0	1.0	1.0	1.0	1.0	1.5	1.5	2.0	2.5	3.0
<b>90</b>	0.0	1.0	1.0	1.0	1.0	1.0	1.5	1.5	2.0	2.0
<b>95</b>	0.0	1.0	1.0	1.0	1.5	1.5	1.5	2.0	2.0	2.5
<b>100</b>	0.0	1.0	1.0	1.5	1.5	2.0	2.5	2.5	3.0	4.0
<b>105</b>	0.0	1.0	1.5	1.5	2.0	2.5	3.0	4.0	4.5	5.5
<b>110</b>	0.0	1.5	1.5	2.0	2.5	3.5	4.0	5.0	6.0	8.0
<b>115</b>	0.0	1.5	2.0	2.5	3.5	4.5	5.5	7.0	8.5	10.5
<b>120</b>	0.0	2.0	2.0	3.0	4.0	5.5	7.0	9.0	11.0	14.0
<b>125</b>	0.0	2.0	2.5	3.5	5.0	7.0	8.0	11.0	14.5	17.5
<b>130</b>	0.0	1.5	2.5	4.0	5.5	7.5	10.0	14.0	18.0	21.0
<b>135</b>	0.0	1.5	2.5	4.0	6.0	8.5	12.0	17.0	19.5	21.5
<b>140</b>	0.0	1.5	2.5	4.0	5.5	8.0	11.5	15.5	20.0	21.5
<b>145</b>	0.0	2.0	2.5	3.5	5.0	7.5	10.5	13.5	17.5	21.0
<b>150</b>	0.0	2.0	2.0	2.5	3.0	6.5	9.5	12.0	14.5	17.5
<b>155</b>	0.0	2.0	2.0	2.0	2.5	4.0	6.5	9.0	11.0	13.0
<b>160</b>	0.0	2.0	2.0	2.0	2.5	3.0	4.0	5.5	6.5	8.0
<b>165</b>	0.0	2.0	2.0	2.0	2.5	3.0	3.5	4.0	4.5	4.5
<b>170</b>	0.0	1.5	1.5	1.5	1.5	1.5	2.0	2.0	2.5	2.5
<b>175</b>	0.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
<b>180</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Vert. Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>	<u>95</u>
<b>0</b>	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
<b>5</b>	21.0	21.5	22.0	22.5	23.0	23.5	24.0	24.5	25.5	26.0
<b>10</b>	17.5	18.5	19.5	20.5	21.5	22.5	23.5	24.5	26.0	27.5
<b>15</b>	15.5	16.5	18.0	19.0	21.0	22.5	24.0	26.0	28.0	29.5
<b>20</b>	14.0	15.5	17.0	18.5	20.5	22.5	24.5	27.0	29.5	32.0
<b>25</b>	13.0	14.5	16.5	18.5	20.5	23.0	25.5	28.0	31.0	34.5
<b>30</b>	11.5	14.0	16.0	18.5	21.0	23.5	26.5	30.0	33.5	37.5
<b>35</b>	11.0	13.5	16.0	18.5	21.5	24.5	28.0	32.0	36.0	41.0
<b>40</b>	10.5	13.0	15.5	19.0	22.0	25.5	29.5	33.5	38.5	44.0
<b>45</b>	11.5	13.5	16.0	19.0	23.0	27.0	31.0	36.0	41.0	47.0
<b>50</b>	12.0	14.0	16.5	19.5	23.5	27.5	32.5	37.5	43.0	50.0
<b>55</b>	12.5	14.5	17.0	20.0	24.0	28.5	33.5	39.0	45.0	52.5
<b>60</b>	12.0	15.0	17.5	20.5	23.5	28.5	34.0	39.5	46.5	55.5

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z9\_AW\_LO\_359\_C1\_IN COVE.IES**

**CANDELA TABULATION - (Cont.)**

<b>65</b>	11.0	14.0	17.0	19.5	23.5	28.0	33.5	40.0	47.5	57.5
<b>70</b>	9.5	11.5	15.5	18.5	21.5	26.5	32.0	39.5	48.0	59.0
<b>75</b>	7.0	9.5	11.5	16.0	20.0	25.5	30.5	37.5	47.5	60.5
<b>80</b>	5.5	6.5	7.0	10.5	14.0	19.0	28.5	34.0	45.5	56.5
<b>85</b>	3.5	4.5	5.0	5.0	8.0	11.0	17.0	23.5	38.5	50.5
<b>90</b>	2.5	3.0	3.5	3.5	3.5	4.0	6.0	11.0	23.0	28.0
<b>95</b>	3.0	3.5	4.0	4.5	5.5	7.0	9.0	16.0	22.5	26.5
<b>100</b>	4.5	5.5	6.5	8.0	10.5	14.5	21.5	28.0	34.0	40.5
<b>105</b>	6.5	8.5	10.5	13.5	17.5	23.5	30.5	36.0	41.5	46.5
<b>110</b>	9.5	12.0	15.0	19.5	25.0	32.0	37.0	42.0	46.5	49.5
<b>115</b>	13.0	16.5	21.0	26.5	32.5	37.0	41.5	46.0	49.5	52.0
<b>120</b>	17.5	21.5	27.0	32.5	36.5	40.5	44.5	48.0	51.0	53.0
<b>125</b>	22.0	27.0	31.0	34.5	38.0	42.5	45.5	48.5	50.5	52.0
<b>130</b>	25.0	28.0	31.5	35.0	38.5	41.5	44.5	47.0	48.5	49.5
<b>135</b>	25.0	28.0	31.0	34.0	37.0	39.5	42.5	43.5	45.0	45.5
<b>140</b>	24.0	26.5	29.0	31.5	34.0	36.5	38.0	39.0	40.0	40.5
<b>145</b>	22.5	24.0	26.0	28.0	30.0	32.0	33.0	34.0	34.5	34.5
<b>150</b>	20.5	22.0	22.5	24.0	25.5	27.0	28.0	29.0	29.0	29.5
<b>155</b>	15.5	17.5	20.0	20.5	21.0	22.0	22.5	23.0	23.0	23.0
<b>160</b>	9.5	11.5	13.5	15.0	16.5	17.5	18.0	18.0	18.0	17.5
<b>165</b>	5.0	5.5	6.5	7.5	8.5	9.5	10.0	10.0	10.5	10.5
<b>170</b>	3.0	3.0	3.0	3.0	3.5	3.5	3.5	3.5	3.5	3.0
<b>175</b>	1.0	1.0	1.0	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>180</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**Vert. Horizontal Angles**

	<u>100</u>	<u>105</u>	<u>110</u>	<u>115</u>	<u>120</u>	<u>125</u>	<u>130</u>	<u>135</u>	<u>140</u>	<u>145</u>
<b>0</b>	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
<b>5</b>	26.5	27.5	28.0	28.5	29.0	30.0	30.5	31.0	31.5	32.0
<b>10</b>	29.0	30.5	31.5	33.0	34.5	36.0	37.5	38.5	40.0	41.0
<b>15</b>	31.5	33.5	36.0	38.5	40.5	43.0	45.5	48.0	50.5	52.5
<b>20</b>	35.0	38.0	41.0	44.5	48.5	52.5	56.0	59.5	63.0	66.0
<b>25</b>	38.5	42.5	47.0	52.0	57.0	62.5	67.5	72.5	78.0	84.0
<b>30</b>	42.5	47.5	53.5	60.0	66.0	73.5	82.0	90.5	98.0	108.5
<b>35</b>	46.5	53.0	60.0	68.5	78.0	88.0	101.0	115.0	128.5	143.0
<b>40</b>	50.5	58.0	67.5	78.0	92.0	108.0	125.5	145.5	165.0	182.0
<b>45</b>	54.0	64.0	76.0	89.5	106.5	133.0	157.5	179.0	198.5	216.5
<b>50</b>	58.5	70.5	85.5	108.0	134.0	161.0	185.0	207.5	227.0	245.0
<b>55</b>	63.0	77.0	98.0	126.0	156.0	183.5	207.5	230.0	245.5	259.5
<b>60</b>	67.5	85.0	110.5	146.0	174.0	201.5	220.0	237.5	250.5	262.0
<b>65</b>	72.5	98.0	129.5	159.5	184.0	204.0	221.0	235.0	247.0	257.0
<b>70</b>	75.5	106.0	137.5	162.0	182.0	198.5	213.5	226.0	237.5	246.5
<b>75</b>	77.5	109.5	132.0	154.0	171.5	185.5	200.5	211.0	221.5	229.0
<b>80</b>	70.5	92.0	117.5	137.0	153.5	167.0	177.5	188.0	196.5	205.0
<b>85</b>	56.0	65.0	89.0	111.0	126.5	141.0	151.0	160.5	170.0	178.0
<b>90</b>	38.0	49.5	56.5	78.5	91.5	109.5	121.5	131.0	142.5	152.0
<b>95</b>	37.0	49.0	60.5	71.0	79.0	92.0	101.0	110.5	121.5	127.0
<b>100</b>	47.5	54.5	63.5	73.5	89.5	96.0	104.0	111.5	119.0	125.5
<b>105</b>	50.5	55.0	60.0	68.0	79.0	89.0	112.0	124.5	133.0	138.5
<b>110</b>	52.0	54.5	57.0	60.5	63.5	66.5	67.0	66.0	111.5	135.5
<b>115</b>	53.5	54.0	55.0	56.5	58.0	59.0	60.5	61.0	61.5	61.5
<b>120</b>	53.5	53.5	53.0	52.5	52.5	53.0	53.0	53.0	52.5	52.0
<b>125</b>	52.5	52.0	51.0	49.5	48.0	47.0	46.5	45.0	44.0	43.0
<b>130</b>	50.0	49.5	48.5	46.0	44.0	41.5	40.0	38.0	36.5	34.5
<b>135</b>	45.5	45.0	44.0	42.5	40.0	37.5	34.5	32.0	29.5	27.5

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z9\_AW\_LO\_359\_C1\_IN COVE.IES**

**CANDELA TABULATION - (Cont.)**

<b>140</b>	40.5	40.0	39.0	37.0	35.5	33.0	30.0	27.0	24.0	21.0
<b>145</b>	34.5	34.0	33.5	32.0	30.0	28.0	25.5	23.0	20.0	17.0
<b>150</b>	29.0	28.0	27.5	26.5	25.0	23.5	21.0	19.0	17.0	14.0
<b>155</b>	23.0	22.5	21.5	20.5	19.5	18.5	17.0	14.5	12.0	9.5
<b>160</b>	17.5	17.5	17.0	16.0	14.5	12.5	11.0	9.0	7.0	5.5
<b>165</b>	10.0	9.5	8.5	7.5	6.5	5.5	5.0	4.5	4.0	3.0
<b>170</b>	3.5	3.5	3.5	3.5	3.5	3.0	2.5	2.0	2.0	1.5
<b>175</b>	1.5	1.5	1.5	1.5	1.5	1.0	1.0	1.0	1.0	1.0
<b>180</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**Vert. Horizontal Angles**

<b>Angles</b>	<b>150</b>	<b>155</b>	<b>160</b>	<b>165</b>	<b>170</b>	<b>175</b>	<b>180</b>
<b>0</b>	25.0	25.0	25.0	25.0	25.0	25.0	25.0
<b>5</b>	32.0	32.5	33.0	33.0	33.5	33.5	33.5
<b>10</b>	42.0	42.5	43.5	44.0	44.0	44.5	44.5
<b>15</b>	54.5	56.0	57.0	58.5	59.0	59.5	59.5
<b>20</b>	69.5	72.0	74.0	76.0	77.0	78.0	78.0
<b>25</b>	89.0	93.5	97.5	100.5	102.5	104.5	105.0
<b>30</b>	118.0	126.5	134.0	139.5	144.0	147.5	148.0
<b>35</b>	156.0	167.5	177.5	185.0	190.5	194.5	195.0
<b>40</b>	196.0	208.5	218.5	226.5	232.5	237.0	237.5
<b>45</b>	231.0	243.5	254.0	262.5	268.5	272.0	273.5
<b>50</b>	258.5	268.5	277.0	284.0	289.0	292.0	293.0
<b>55</b>	271.0	279.0	285.5	291.0	295.0	297.5	298.5
<b>60</b>	271.5	279.0	285.5	290.5	294.0	296.5	297.5
<b>65</b>	267.0	273.5	279.0	283.5	287.0	289.5	290.5
<b>70</b>	255.0	261.5	266.5	271.0	274.5	276.5	277.0
<b>75</b>	236.5	243.0	247.5	251.5	255.0	257.0	258.0
<b>80</b>	212.0	218.0	223.5	228.0	231.0	233.0	234.0
<b>85</b>	186.0	192.5	197.5	201.5	204.5	206.0	207.0
<b>90</b>	157.5	163.5	169.0	173.0	176.0	178.0	178.5
<b>95</b>	135.5	139.5	145.5	150.0	151.0	151.0	151.5
<b>100</b>	131.5	136.0	140.0	143.5	145.5	147.0	147.0
<b>105</b>	142.0	146.0	148.5	152.0	153.0	153.5	153.5
<b>110</b>	168.5	167.5	173.0	175.5	177.5	177.0	176.5
<b>115</b>	74.5	94.0	76.5	140.5	96.0	165.0	207.5
<b>120</b>	51.0	49.5	48.5	46.5	44.0	49.5	42.5
<b>125</b>	41.0	39.5	37.0	34.5	31.5	30.0	30.5
<b>130</b>	33.0	30.5	27.5	25.0	22.0	21.0	21.0
<b>135</b>	25.0	22.5	19.5	16.5	14.0	12.5	12.5
<b>140</b>	18.5	16.0	13.0	9.0	7.0	6.0	6.0
<b>145</b>	14.0	10.5	7.0	4.5	2.0	1.5	1.5
<b>150</b>	10.5	7.5	5.0	2.5	1.0	0.5	0.5
<b>155</b>	7.0	5.5	3.0	1.5	1.0	0.5	0.5
<b>160</b>	4.5	3.0	1.5	1.0	1.0	1.0	1.0
<b>165</b>	2.0	1.5	1.0	1.0	1.0	1.0	1.0
<b>170</b>	1.0	1.0	1.0	1.0	1.0	1.0	1.0
<b>175</b>	1.0	1.0	1.0	1.0	1.0	1.0	1.0
<b>180</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**IES INDOOR REPORT**

PHOTOMETRIC FILENAME : VODE\_707\_Z9\_AW\_LO\_359\_C1\_IN COVE.IES

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	11.53	N.A.	1.50
0-30	31.71	N.A.	4.10
0-40	72.71	N.A.	9.40
0-60	237.41	N.A.	30.70
0-80	450.39	N.A.	58.30
0-90	532.42	N.A.	68.90
10-90	529.91	N.A.	68.60
20-40	61.17	N.A.	7.90
20-50	130.81	N.A.	16.90
40-70	272.97	N.A.	35.30
60-80	212.98	N.A.	27.60
70-80	104.71	N.A.	13.50
80-90	82.04	N.A.	10.60
90-110	122.94	N.A.	15.90
90-120	170.67	N.A.	22.10
90-130	199.85	N.A.	25.90
90-150	232.76	N.A.	30.10
90-180	240.47	N.A.	31.10
110-180	117.53	N.A.	15.20
0-180	772.89	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	2.51
10-20	9.02
20-30	20.18
30-40	41.00
40-50	69.64
50-60	95.07
60-70	108.27
70-80	104.71
80-90	82.04
90-100	60.58
100-110	62.35
110-120	47.73
120-130	29.19
130-140	20.57
140-150	12.33
150-160	5.96
160-170	1.62
170-180	0.14


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : VODE\_707\_Z9\_AW\_LO\_359\_C1\_IN COVE.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	112	112	112	112	105	105	105	105	94	94	94	83	83	83	73	73	73	69
1	96	89	82	77	90	83	78	73	73	69	64	64	60	57	55	52	50	45
2	84	73	64	57	78	69	61	54	60	53	48	52	47	42	44	40	36	32
3	75	62	52	44	70	58	49	41	50	43	37	43	37	32	37	32	28	24
4	68	53	43	35	63	50	40	33	43	35	29	37	30	25	31	26	22	18
5	61	46	36	28	57	43	34	27	38	30	23	32	26	20	27	22	17	14
6	56	41	31	23	52	38	29	22	33	25	19	28	22	17	24	18	14	11
7	51	36	27	20	47	34	25	19	29	22	16	25	19	14	21	16	12	9
8	47	33	23	17	44	30	22	16	27	19	14	23	17	12	19	14	10	8
9	44	29	21	15	41	28	19	14	24	17	12	21	15	10	18	12	9	6
10	41	27	18	13	38	25	17	12	22	15	10	19	13	9	16	11	8	5

POLAR GRAPH

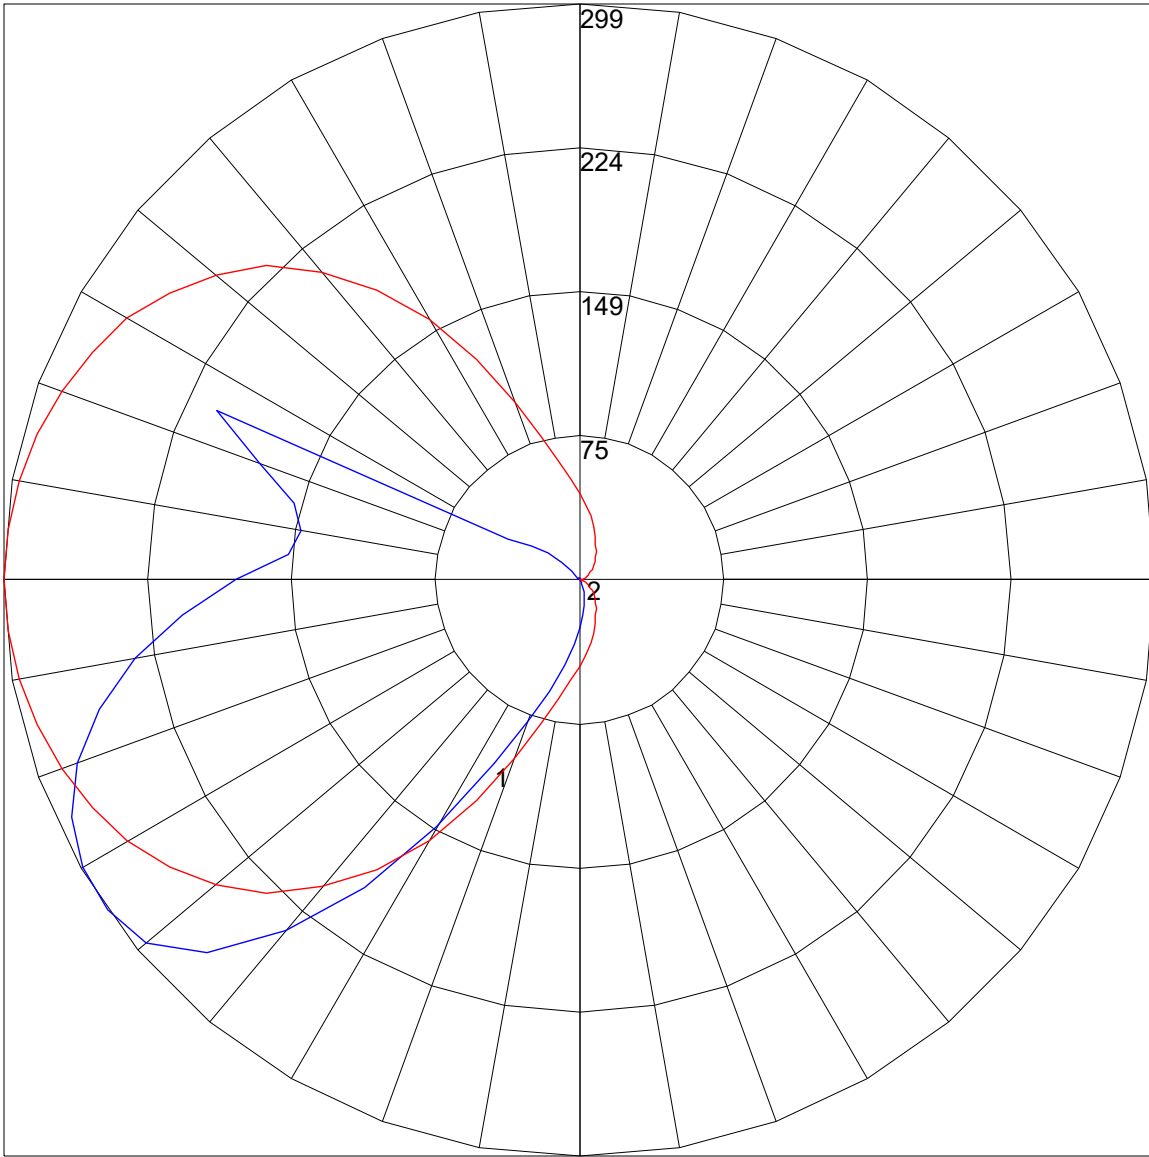

Maximum Candela = 298.5 Located At Horizontal Angle = 180, Vertical Angle = 55  
# 1 - Vertical Plane Through Horizontal Angles (180 - 0) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (55) (Through Max. Cd.)