

IES Report

WingRail® | 107 | Diffuse | 80 CRI | HO

107-WG-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-D1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	79	80	82
Total Lumens, 4' rail length (1219mm)	3738	3856	3934	4013
Lumens per foot (305mm)	934	964	984	1003
Input Power (W), 4' rail length (1219mm)	49.2	49.2	49.2	49.2
Watts per foot (305mm)	12.4	12.4	12.4	12.4
CRI	85	85	85	85

Due to the large number of options in Vode’s product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_D1.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L091700112 (SOURCE REPORT FOR REFERENCE)
[TESTLAB] REPORT BASED ON DATA PRODUCED BY NVLAP ACCREDITED LAB
[ISSUEDATE] 11/1/2017
[MANUFAC] Vode Lighting
[LUMCAT] 107-WG-48-Z-HO-35-D1
[LUMINAIRE] WingRail LED, 48", 3500K, 80 CRI, zipper board,
[MORE] diffuse lens, high output
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3934
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	80
Total Luminaire Watts	49.22
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.26
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.13 ft
Luminous Width (90-270)	3.83 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	28027	28027	28027
55	26820	26907	26995
65	24780	25077	25255
75	20909	21490	22071
85	13223	13798	15523

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_D1.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52
5	1382.72	1382.72	1382.72	1381.56	1381.56	1381.56	1381.56	1381.56	1381.56	1381.56
10	1364.16	1364.16	1363.00	1363.00	1363.00	1363.00	1363.00	1363.00	1363.00	1363.00
15	1332.84	1332.84	1331.68	1331.68	1331.68	1331.68	1331.68	1331.68	1331.68	1331.68
20	1288.76	1288.76	1288.76	1287.60	1287.60	1287.60	1287.60	1287.60	1287.60	1287.60
25	1234.24	1234.24	1234.24	1233.08	1233.08	1233.08	1233.08	1233.08	1233.08	1233.08
30	1169.28	1169.28	1168.12	1168.12	1168.12	1168.12	1168.12	1168.12	1168.12	1168.12
35	1093.88	1093.88	1092.72	1092.72	1092.72	1092.72	1092.72	1092.72	1092.72	1092.72
40	1010.36	1009.20	1009.20	1009.20	1009.20	1009.20	1009.20	1009.20	1009.20	1009.20
45	917.56	917.56	916.40	916.40	916.40	917.56	917.56	917.56	917.56	917.56
50	817.80	817.80	817.80	817.80	817.80	817.80	818.96	818.96	818.96	818.96
55	712.24	712.24	712.24	712.24	712.24	713.40	713.40	713.40	714.56	714.56
60	600.88	600.88	600.88	600.88	602.04	602.04	603.20	603.20	604.36	604.36
65	484.88	484.88	484.88	486.04	486.04	487.20	488.36	488.36	489.52	490.68
70	366.56	367.72	367.72	368.88	368.88	370.04	371.20	372.36	372.36	373.52
75	250.56	250.56	251.72	251.72	252.88	254.04	255.20	255.20	256.36	257.52
80	140.36	140.36	141.52	141.52	142.68	143.84	145.00	146.16	147.32	148.48
85	53.36	53.36	53.36	53.36	53.36	54.52	54.52	54.52	54.52	55.68
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52	1388.52
5	1381.56	1381.56	1381.56	1381.56	1381.56	1381.56	1381.56	1381.56	1381.56
10	1363.00	1363.00	1363.00	1363.00	1363.00	1363.00	1363.00	1363.00	1363.00
15	1331.68	1331.68	1331.68	1331.68	1331.68	1331.68	1331.68	1331.68	1330.52
20	1287.60	1287.60	1287.60	1287.60	1287.60	1287.60	1287.60	1287.60	1287.60
25	1233.08	1233.08	1233.08	1233.08	1233.08	1231.92	1231.92	1231.92	1231.92
30	1166.96	1166.96	1166.96	1166.96	1166.96	1166.96	1166.96	1166.96	1166.96
35	1092.72	1092.72	1092.72	1092.72	1092.72	1092.72	1091.56	1092.72	1091.56
40	1009.20	1009.20	1009.20	1008.04	1008.04	1008.04	1009.20	1008.04	1008.04
45	917.56	917.56	917.56	917.56	917.56	917.56	917.56	917.56	917.56
50	818.96	818.96	820.12	820.12	820.12	820.12	820.12	820.12	820.12
55	714.56	714.56	715.72	715.72	715.72	715.72	716.88	716.88	716.88
60	604.36	605.52	606.68	606.68	606.68	607.84	607.84	607.84	607.84
65	490.68	491.84	493.00	493.00	494.16	494.16	494.16	495.32	494.16
70	374.68	375.84	377.00	377.00	378.16	379.32	379.32	379.32	379.32
75	258.68	261.00	261.00	262.16	263.32	263.32	264.48	264.48	264.48
80	149.64	150.80	151.96	153.12	154.28	155.44	155.44	155.44	155.44
85	55.68	56.84	58.00	59.16	60.32	61.48	62.64	62.64	62.64
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_D1.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	507.05	N.A.	12.90
0-30	1075.24	N.A.	27.30
0-40	1758.74	N.A.	44.70
0-60	3104.52	N.A.	78.90
0-80	3863.09	N.A.	98.20
0-90	3934.38	N.A.	100.00
10-90	3803.07	N.A.	96.70
20-40	1251.7	N.A.	31.80
20-50	1959.23	N.A.	49.80
40-70	1830.58	N.A.	46.50
60-80	758.56	N.A.	19.30
70-80	273.76	N.A.	7.00
80-90	71.29	N.A.	1.80
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	3934.38	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	131.31
10-20	375.74
20-30	568.19
30-40	683.50
40-50	707.54
50-60	638.25
60-70	484.80
70-80	273.76
80-90	71.29
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_107_WG_HO_35_D1.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84
2	99	91	84	78	96	89	82	77	85	80	75	82	77	73	79	75	72	70
3	90	79	71	65	88	78	70	64	75	68	63	72	67	62	70	65	61	59
4	82	70	61	55	80	69	61	54	66	59	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	50	44	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	29	27
10	53	40	32	26	52	39	31	26	38	31	26	37	31	26	36	30	26	24

POLAR GRAPH

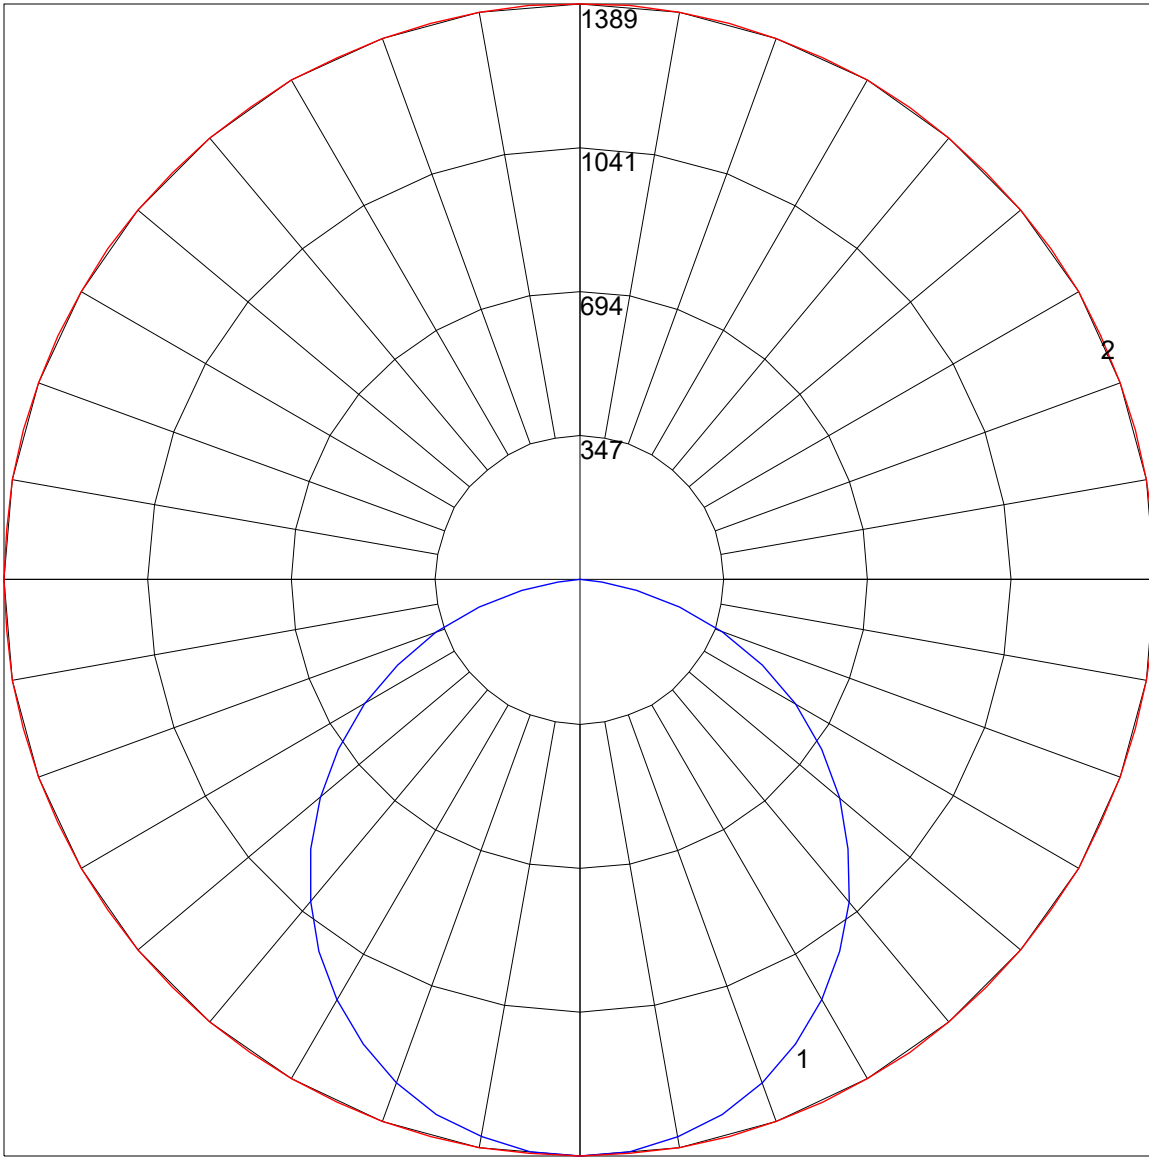

Maximum Candela = 1388.52 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)